

Data sheet

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

Page 1/6

P/N

1502005200-E


EAN 4250184108214

2018-27-02

Illustrations



Dimensional drawing

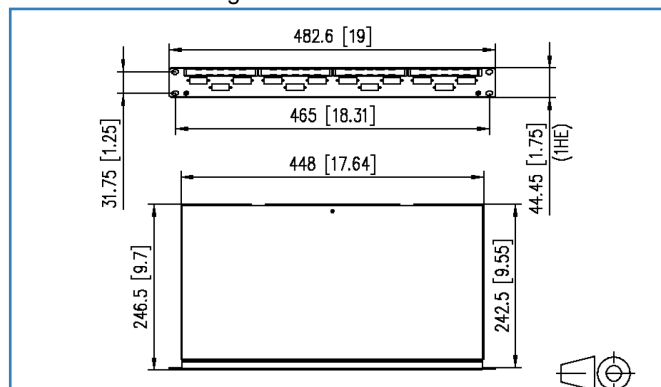

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU fiber optic patch panel for fixed installation
- unequipped
- light construction with aluminum front plate and housing
- removable front plate for easy adapter mounting
- 10 possible cable entries in the rear panel for 4x PG13.5, 2x PG16/M20 or 2x PG21/M25 cable glands and for two pre-terminated installation cables (VIK)
- snap-on cover for easy access during service work
- label windows for enclosed identification labels
- accepts up to 4 splice trays and 1 splice tray cover

variants

24x LC-D

12x SC-D

24x ST

suitable cutouts

LC-D, SC simplex, E2000 simplex

SC-D, LC-Q

ST



OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2018-27-02

Technical Data

General Data

Fields of application	Office Data center
Design	patch panel
Color	anodized alu.
Dimensions	
Dimension (L x W x H)	246.50 x 482.60 x 44.45 mm
Dimension (W x H)	19.00 x 1.75 in.
Inches	19 inches
Height unit	1RU
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Connector technology interface 1	SC-D
Number of ports interface 1	12
Number of equipped ports interface 1	0
Connector technology interface 2	SC-D
Number of ports interface 2	12
Number of ports interface 2 equipped	0
Cable sheath diameter (min. - max.)	
Cable sheath diameter	3.00 - 20.00 mm
Cable sheath diameter	0.118 - 0.787 in.
Cable access/outlet	several possibilities for cable entry on the back

Mechanical characteristics

Cut-out	SC-D, LC-Q, ST-D
strain relief	cable tie

Materials and material properties

Material - Housing	Al (Aluminium)
Material - Front cover	Al (Aluminium)
Material - Front cover finish	anodized
Material - Cover	Al (Aluminium)



Data sheet

Page 3/6

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2018-27-02

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-40 - 70 °C
Temperature - Storage °F	-40 - 158 °F
Temperature - Operating °C	-40 - 70 °C
Temperature - Operating °F	-40 - 158 °F

Approvals

RoHS	compliant
------	-----------

Classifications

ETIM 5.0	EC001130
ETIM 6.0	EC001130

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1755.00 g
Packaging unit - Weight (pound)	3.87 lb
Packaging dimension (W x H x D)	540.00 x 380.00 x 60.00 mm
Packaging dimension (W x H x D)	21.26 x 14.961 x 2.362 in.



OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

P/N

1502005200-E

EAN 4250184108214

2018-27-02

Accessories

P/N	Designation
15090051-I	OpDAT ST-D adapter MM (ceramic, metallike)
15090052-I	OpDAT SC-D adapter OM2 (metallike)
15090053-I	OpDAT ST-D/SC-D adapter MM (ceramic, metallike)
1509010000-E	OpDAT splice tray for 12 splices unequipped
899789-01	Label sheet for E-DAT C6 and E-DAT design patch panels
15090071-I	OpDAT LC-Q adapter OS2 (blue)
150900C2-I	OpDAT SC-D adapter MM (Ph-Br, metallike)
150900D2-I	OpDAT SC-D adapter OS2 (metallike+blue)
15090041-I	OpDAT ST-D adapter MM (Ph-Br, metallike)
150900C3-I	OpDAT SC-D/ST-D adapter MM (Ph-Br, metallike)
15090072-I	OpDAT LC-Q adapter MM (Ph-Br, beige)
150900D3-I	OpDAT ST-D/SC-D adapter OS2 (metallike)
1509007A-I	OpDAT LC-Q APC adapter OS2 (green)
15090078-I	OpDAT LC-Q adapter OM3 (aqua)
15090079-I	OpDAT LC-Q adapter OM4 (violet)
150900BA-I	OpDAT SC-D adapter OM3 (aqua)
150900BB-I	OpDAT SC-D adapter OM4 (violet)
150900B2-I	OpDAT SC-D adapter OM2 (beige)
150900E2-I	OpDAT SC-D adapter OS2 (blue)
150900F2-I	OpDAT SC-D APC adapter OS2 (green)
150922EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM2 mit Crimpspleißschutz
150925EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC PC OM3 mit Crimpspleißschutz
150929EO00-E	OpDAT vorkonfektionierte Spleißkassette 12xSC UPC OS2 mit Crimpspleißschutz
150900D4-I	OpDAT SC-D APC adapter OS2 (metallike+green)
15090052-30	OpDAT SC-D adapter OM2 (metallike) - 30 pieces
15090071-30	OpDAT LC-Q adapter OS2 (blue) - 30 pieces
15090078-30	OpDAT LC-Q adapter OM3 (aqua) - 30 pieces
15090079-30	OpDAT LC-Q adapter OM4 (violet) - 30 pieces
1509007A-30	OpDAT LC-Q APC adapter OS2 (green) - 30 pieces
150900B2-30	OpDAT SC-D adapter OM2 (beige) - 30 pieces
150900BA-30	OpDAT SC-D adapter OM3 (aqua) - 30 pieces
150900BB-30	OpDAT SC-D adapter OM4 (violet) - 30 pieces
150900D2-30	OpDAT SC-D adapter OS2 (metallike+blue) - 30 pieces



Data sheet

OpDAT PF patch panel unequipped for 12xSC-D/LC-Q/ST-D, gray

Page 5/6

P/N

1502005200-E

EAN 4250184108214

2018-27-02

Accessories

150900D3-30	OpDAT ST-D/SC-D adapter OS2 (metallike) - 30 pieces
150900D4-30	OpDAT SC-D APC adapter OS2 (metallike+green)- 30 pieces
150900E2-30	OpDAT SC-D adapter OS2 (blue) - 30 pieces
150900F2-30	OpDAT SC-D APC adapter OS2 (green) - 30 pieces



Data sheet

**OpDAT PF patch panel unequipped
for 12xSC-D/LC-Q/ST-D, gray**

Page 6/6

P/N

1502005200-E

EAN 4250184108214

2018-27-02

Illustrations

Dimensional drawing

