
# Data sheet
## PR01502VBHC Type 017




P/N
31017102

2026/11/12
Version: B


## Illustrations

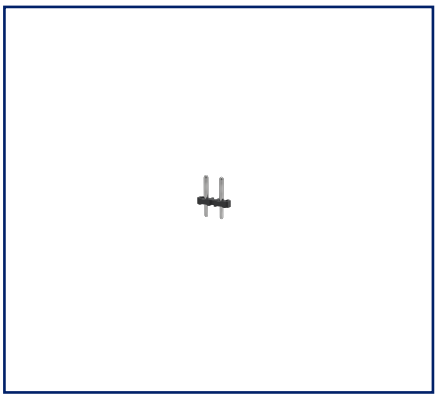

Dimensional drawing as an example

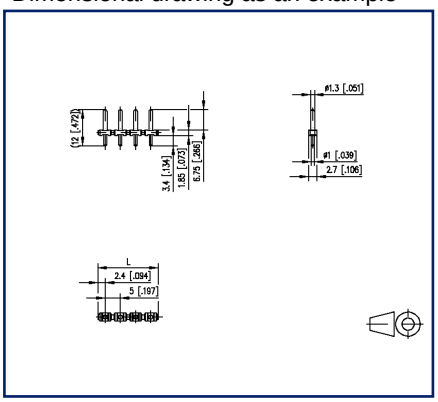


Drill pattern as an example

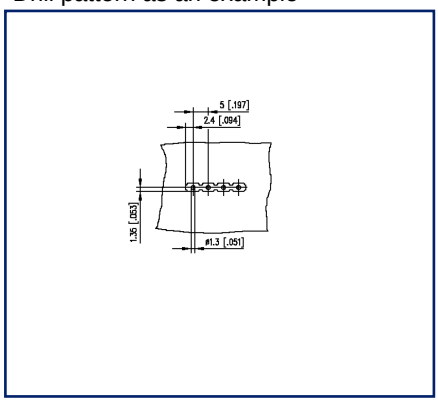


See enlarged drawings at the end of document

## Product specification

- pin header, THR solderable
- centerline 5.00 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- Tape & Reel packaging possible

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433 | info@metz-connect.com
Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com

## Technical Data

| | | | |
|---|---|---|---|
| **General Data** | | | |
| Solder pin length | 3.4 mm | | |
| pole size | 2 | | |
| Insulating material class | CTI 400 | | |
| clearance/creepage dist. | 3.7 mm | | |
| Protection category | IP00 | | |
| Rated current | 10 A | | |
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Rated voltage | 250 V | 500 V | 500 V |
| Rated test voltage | 4 kV | 4 kV | 4 kV |
| **Approvals** | | | |
| c UL us V / A | 300 / 15 | | |
| approval UL - File No. | E121004 | | |
| SEV | 250 V / 4 kV / 10 A / 1.0 mm | | |
| **Material** | | | |
| insulating material | PA | | |
| flammability class | V0 | | |
| contact pin material | CuZnPb | | |
| contact pin surface | Ni + Ag | | |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 | | |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 | | |
| **Climatic Data** | | | |
| upper limit temperature | 105 °C | | |
| lower limit temperature | -40 °C | | |
| **general** | | | |
| Tolerance | ISO 2768 -mH | | |
| Solderability | reflowable | | |
| **Application note** | | | |

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Technical Data

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!


## Counterpart of

| P/N | Designation |
|---|---|
| 31007102 | RP02502IBWC (Type 007), 2-pole |
| 31107102 | RP02502HBWC Type 107 |
| 709002 | Tape_017_15.5_3pol_32mm CT2403 CL5 25B6 L14 W32 Tape_017_32mm |
| ASP0250204-001 | SP02502HDNC ASP0250204-001 |

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Illustrations

Dimensional drawing as an example

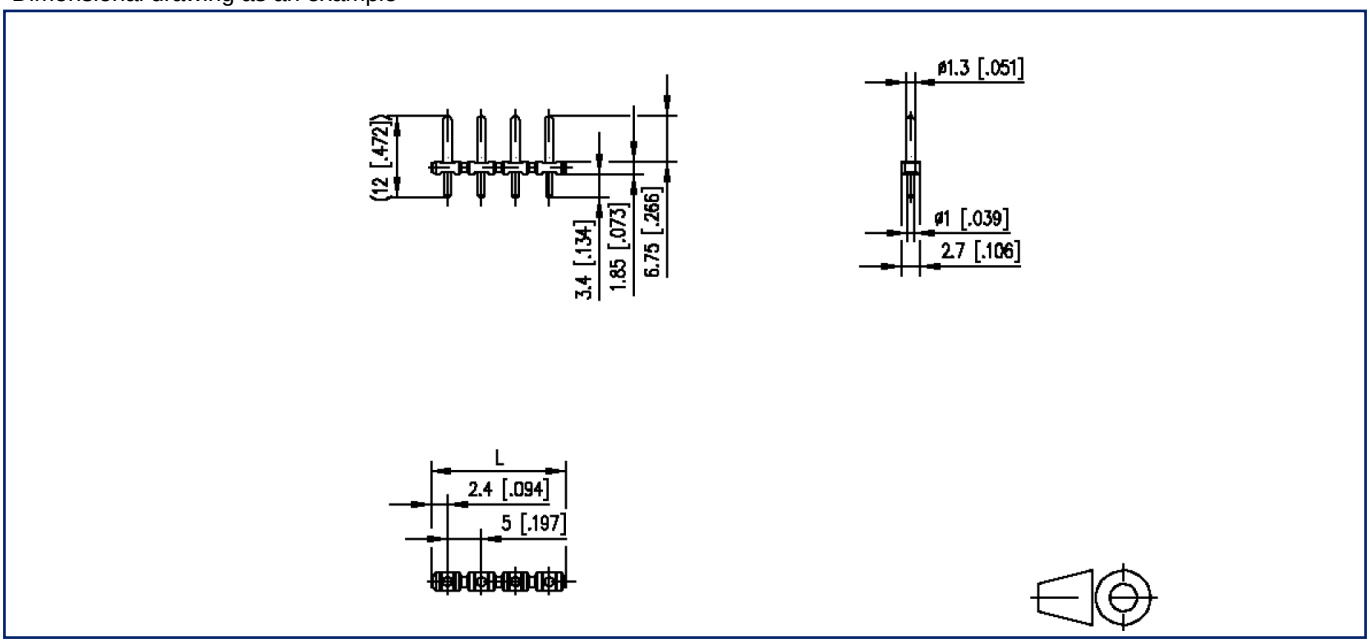



L=(pole size - 1) x centerline + 4.8 mm [0.189]

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Illustrations

Drill pattern as an example

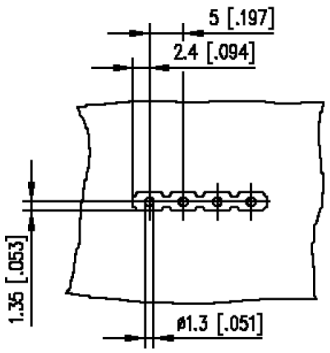


© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!