

# Data sheet

## OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres

Page 1/5

P/N  
152PPTFTFXYYZZ


2025/06/25

Version: G


### Illustrations



Dimensional drawing

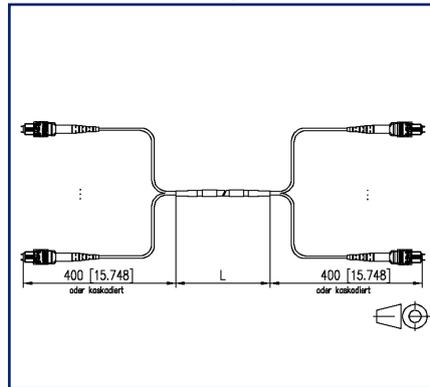

Principle diagram

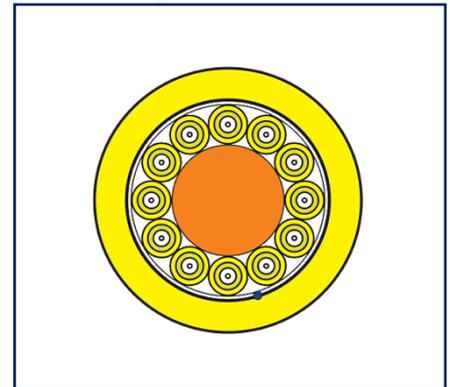

See enlarged drawings at the end of document

### Product specification

- Trunk cable with 12 SM fibres, assembled on both sides with one MPO/MTP® connector each.
- Available in the assignment variant polarity A or B.
- A insertion aid incl. fastening set is optionally available on one side.
- Breakout cable with aramid yarn, suitable for indoor applications.
- diameter 4.5 mm, UV-stabilized, flame retardant and halogen-free
- Fiber type: Singlemode fiber, E9/125 µm, OS2 (IEC 11801), IEC 60793-2-50 B.1.3 and B.6\_a, bend insensitive according to ITU-T G657.A1, compatible to ITU-T G.652.D.
- 100 % tested for insertion loss, return loss and end face geometry
- all trunk cables with serial number, barcode and measurement protocol
- all available variants can be created with the MTP® configurator
- MTP® is a registered trademark of US Conec Ltd., USA



## Technical Data

### General Data

|                                               |                                   |
|-----------------------------------------------|-----------------------------------|
| Fields of application                         | data center                       |
| Mechanical measurement according to MICE      | M1                                |
| Ingress measurement according to MICE         | I1                                |
| Climatic measurement according to MICE        | C1                                |
| Electromagnetic measurement according to MICE | E3                                |
| Design                                        | breakout cable                    |
| Transmission technology                       | Fiber optic                       |
| Color                                         | yellow                            |
| Color coding fiber/ wire(s)                   | EIA/TIA 598                       |
| Dimensions                                    |                                   |
| Dimension - Interface 1 (L x W x H)           | 60.4 mm x 12.5 mm x 7.5 mm        |
| Dimension - Interface 1 (L x W x H)           | 2.378 in. x 0.492 in. x 0.295 in. |
| Dimension - Interface 2 (L x W x H)           | 60.4 mm x 12.5 mm x 7.5 mm        |
| Dimension - Interface 2 (L x W x H)           | 2.378 in. x 0.492 in. x 0.295 in. |
| Mode type of the fiber                        | Singlemode                        |
| Fiber class                                   | OS2                               |
| Cable Type                                    | Breakout                          |
| Number of cables/ buffered fibers             | 1                                 |
| Number of fibres each cable/ wire             | 12                                |
| Shape                                         | APC (Angled Physical Contact)     |
| Fiber construction                            | 9/125 µm                          |

### Connections/interfaces

|                                     |          |
|-------------------------------------|----------|
| Connector technology interface 1    | MPO/MTP® |
| Connector technology interface 2    | MPO/MTP® |
| Number of ports interface 1         | 4        |
| Number of ports interface 2         | 4        |
| Cable sheath diameter (min. - max.) |          |
| Cable sheath diameter               | 4.5      |
| Core-/ Fiber cladding diameter      | 3 mm     |
| Primary coating diameter            | 125 µm   |



## Technical Data

### Optical characteristics

|                |              |
|----------------|--------------|
| Insertion loss | max. 0,35 dB |
| Return loss    | min. 60 dB   |

### Mechanical data

|                                  |                |
|----------------------------------|----------------|
| strain relief                    | aramide fibres |
| Permanent tensile strength       | 1000 N         |
| Maximum installation load        | 68 mm          |
| Maximum operating bending radius | 90 mm          |
| Crush (compressive strength)     | 1200 N/100 mm  |
| Fire load                        | 4100 MJ/km     |

### Materials and material properties

|                              |           |
|------------------------------|-----------|
| Material - Coupler housing   | Plastics  |
| Material - Cable jacket      | LSHF      |
| Flame retardancy             | yes       |
| Halogen free                 | yes       |
| Metal-free                   | yes       |
| UV-resistance                | yes       |
| Longitudinal water tightness | yes       |
| RoHS                         | compliant |

### Standards/Regulations

|                                  |             |
|----------------------------------|-------------|
| Fibre optic connector interfaces | IEC 61754-7 |
|----------------------------------|-------------|

### Classifications

|          |          |
|----------|----------|
| ETIM 7.0 | EC002700 |
| ETIM 8.0 | EC002700 |

### Packing details

|                   |               |
|-------------------|---------------|
| Type of packaging | 1 pc(s) / box |
|-------------------|---------------|

Data sheet

Page 4/5

**OpDAT trunk cable OS2 1xMTP-F/1xMTP-F BO 12 fibres**P/N  
152PPTFTFXYYZZ

2025/06/25

Version: G


**Technical Data****Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



**Illustrations**

Dimensional drawing

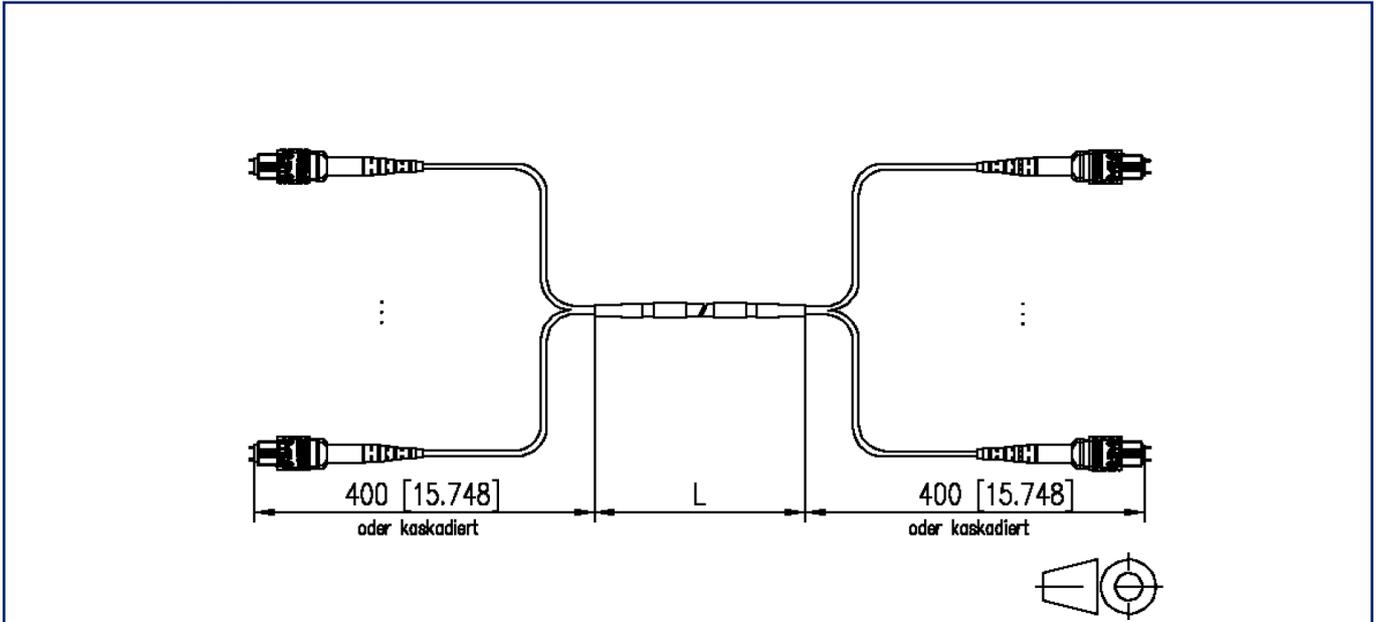

Principle diagram

