


# Data sheet

## OpDAT breakout cable 12x1 OM5 class D<sub>ca</sub>


Page 1/4

P/N  
150B0128D010M  
EAN 4251394653716  
2025/06/18  
Version: J

### Illustrations

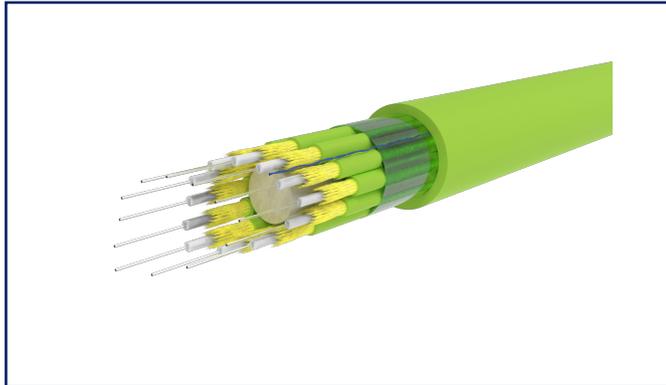

Principle diagram

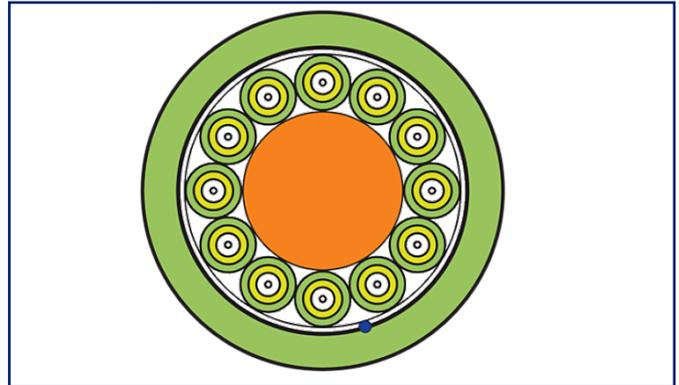

See enlarged drawings at the end of document

### Product specification

- connection cable I-V(ZN)HH
- breakout cable for direct connector termination for indoors and outdoors
- bend insensitive fiber
- cable jacket: LSHF-FR
- UV-resistant, metal-free, longitudinally watertight
- cable structure: several separately strain relieved cables in one outer jacket
- strain relief: aramid
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-2, IEC 60794-2-10, EN 187000
- fire behaviour: class Dca s1 d1 a1 acc. to EN 50399 (classification acc. to EN 13501-6)
- variants: number of OS2 fibers: 2x1, 4x1, 8x1, 12x1, 24x1
- variants: number of OM5 fibers: 4x1, 8x1, 12x1
- variants: number of OM4 fibers: 2x1, 4x1, 8x1, 12x1, 24x1
- variants: number of OM3 fibers: 2x1, 4x1, 8x1, 12x1, 24x1
- all available variants can be created with the configurator



# OpDAT breakout cable 12x1 OM5 class D<sub>ca</sub>

P/N  
**150B0128D010M**  
**EAN 4251394653716**  
 2025/06/18  
 Version: J

## Technical Data

### General Data

Fields of application	interior structured building cabling office areas
Transmission technology	Fiber optic
Mode type of the fiber	Multimode
Fiber class	OM5
Cable Type	breakout cable
Number of cables/ buffered fibers	12
Number of fibres each cable/ wire	1
Weight	160 kg/km

### Geometric characteristics

Outer diameter cable jacket (mm)	12.5 mm
Outer diameter cable jacket (inch)	0.492 in.
Core-/ Fiber cladding diameter	2mm / 900µm

### Mechanical data

strain relief	aramide yarn
Tensile strength during operation	1150 N
Maximum installation load (max.)	3500 N
Maximum installation load	150 mm
Maximum operating bending radius	250 mm
Impact resistance	5 J
Crush (compressive strength)	1500 N/100 mm
Torsion resistance	5 cycles ± 1 rotation
Fire load	2500 MJ/km

### Materials and material properties

Halogen free	yes
Metal-free	yes
UV-resistance	yes

# OpDAT breakout cable 12x1 OM5 class D<sub>ca</sub>

P/N  
**150B0128D010M**  
**EAN 4251394653716**  
 2025/06/18  
 Version: J

## Technical Data

### Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 70 °C
Temperature - Storage °F	-40 °F - 158 °F
Temperature - Operating °C	-20 °C - 70 °C
Temperature - Operating °F	-4 °F - 158 °F
Temperature - Installation °C	-20 °C - 70 °C
Temperature - Installation °F	-4 °F - 158 °F

### Standards/Regulations

Common test methods for cables under fire conditions

Fire behaviour - class (EN 50399)		Dca
-----------------------------------	--	-----

### Classifications

ETIM 7.0	EC000034
ETIM 8.0	EC000034

### Packing details

Type of packaging	1 pc(s) / drum
-------------------	----------------

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/4

OpDAT breakout cable 12x1 OM5 class D<sub>ca</sub>

P/N

150B0128D010M

EAN 4251394653716

2025/06/18

Version: J

## Illustrations

Principle diagram

