

Data sheet

Coding star gray with a group of 6 coding pins


Page 1/4

P/N
720243-01-42025/08/21
Version: I

Illustrations



Dimensional drawing as an example

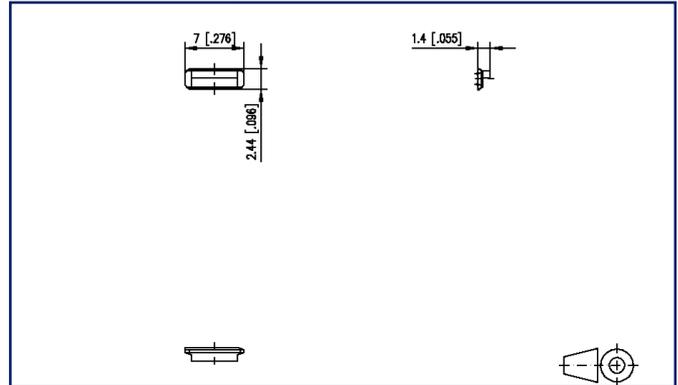

See enlarged drawings at the end of document

Product specification

- The coding pins are inserted into the slots provided in the terminal block and respective header
- This method of coding does not result in any circuit loss. Please refer to the drawing below for further details.
- Variants: 720243-01-3 with 6 coding pins orange left; 720243-02-3 with 6 coding pins orange right, 720243-01-4 6 with 6 coding pins gray left, 720243-02-4 with 6 coding pins gray right



Coding star gray with a group of 6 coding pinsP/N
720243-01-42025/08/21
Version: I**Technical Data****Material**

insulating material	PA66
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 3/4

Coding star gray with a group of 6 coding pinsP/N
720243-01-42025/08/21
Version: I**Accessories from**

P/N	Designation
311692	RP01JxxVBWN Typ 169



Illustrations

Dimensional drawing as an example

