


Data sheet

OpDAT REGpro front cover 6xLC-Q OM3


Page 1/5

P/N
15024A7806-E
EAN 4250184161127
2025/09/17
Version: AD

Illustrations

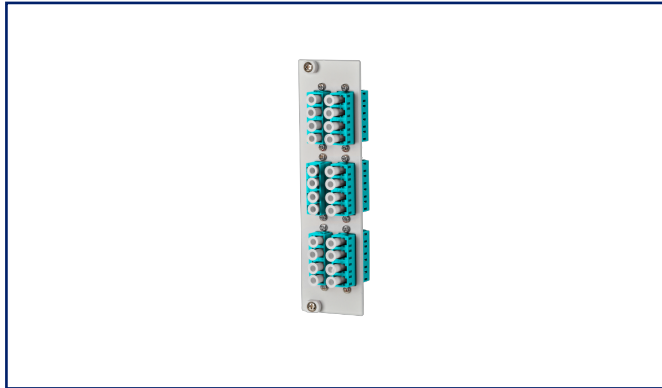

Dimensional drawing

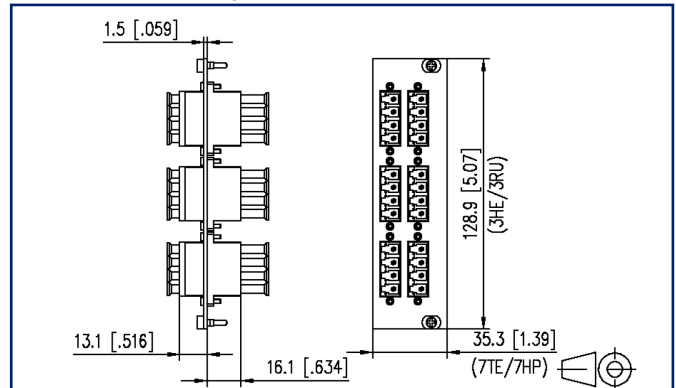

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP LC-Q adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REGpro24 and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with 3 or 6 LC-Q adapters, each in blue (OS2), violet (OM4), aqua (OM3) or LC-Q APC adapters, each in green (OS2)



OpDAT REGpro front cover 6xLC-Q OM3

P/N

15024A7806-E

EAN 4250184161127

2025/09/17

Version: AD

Technical Data

General Data

| | |
|---|--|
| Fields of application | structured building cabling office areas data center |
| Mechanical measurement according to MICE | M1 |
| Ingress measurement according to MICE | I1 |
| Climatic measurement according to MICE | C1 |
| Electromagnetic measurement according to MICE | E3 |
| Design | front plate |
| Mounting style | 3RU/7HP |
| Transmission technology | Fiber optic |
| Color | aqua |
| Dimensions | |
| Dimension (L x W x H) | 30.7 mm x 128.9 mm x 35.3 mm |
| Dimension (L x W x H) | 1.209 in. x 5.075 in. x 1.39 in. |
| Height unit | 3RU |
| Horizontal pitch | 7HP |
| Mode type of the fiber | Multimode |

Connections/interfaces

| | |
|--|---------------|
| Connector technology interface 1 | LC-Q Couplers |
| Connector technology interface 2 | LC-Q Couplers |
| Number of ports interface 1 | 6 |
| Number of ports interface 2 | 6 |
| Number of equipped ports interface 1 | 6 |
| Number of ports interface 2 equipped | 6 |
| Number of ports with dust protection interface 1 | 6 |
| Number of ports with dust protection interface 2 | 6 |

Mechanical data

| | |
|--------------------------------|------------------|
| Cut-out | SC-D, LC-Q, ST-D |
| Life - Number of mating cycles | min. 1000 |

OpDAT REGpro front cover 6xLC-Q OM3

P/N

15024A7806-E

EAN 4250184161127

2025/09/17

Version: AD

Technical Data**Materials and material properties**

| | |
|----------------------------------|------------------|
| Material - Mounting plate | steel |
| Material - Mounting plate finish | powder-coated |
| Material - Sleeve | ceramic, slotted |
| Material - Coupler housing | Plastics |
| Halogen free | yes |
| RoHS | compliant |

Classifications

| | |
|-----------|----------|
| ETIM 7.0 | EC001130 |
| ETIM 8.0 | EC001130 |
| ETIM 9.0 | EC001130 |
| ETIM 10.0 | EC001130 |

Packing details

| | |
|-------------------|-----------------------|
| Type of packaging | 1 pc(s) / plastic bag |
|-------------------|-----------------------|

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

OpDAT REGpro front cover 6xLC-Q OM3

P/N

15024A7806-E

EAN 4250184161127

2025/09/17

Version: AD

Accessories from

| P/N | Designation |
|---------------|--|
| 15024A10-24-E | OpDAT REGpro24 housing without splice tray |



Illustrations

Dimensional drawing

