

# Data sheet

## OpDAT patch cord 2x1 OM4 50.0 m

Page 1/4

P/N


150S100050M

EAN 4251394654355


2025/10/15

Version: I

### Illustrations

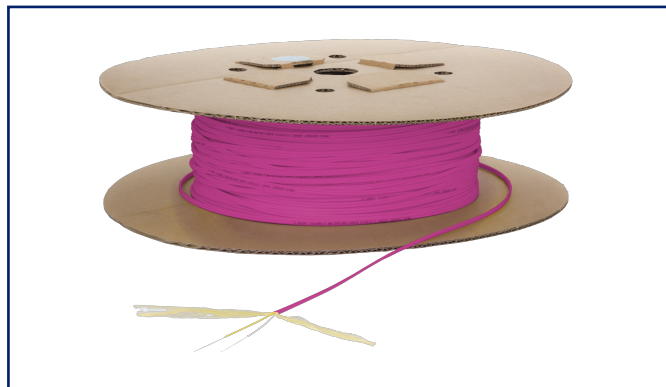

Principle diagram

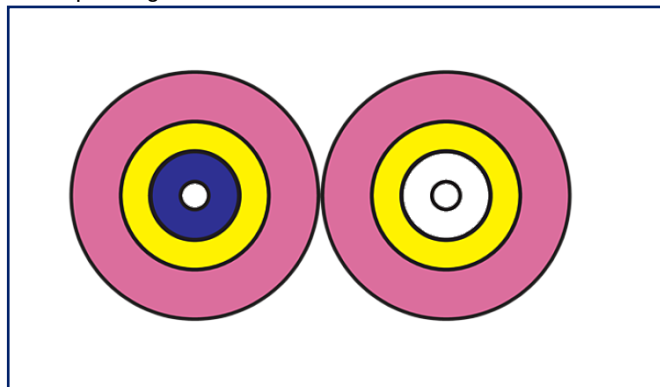

See enlarged drawings at the end of document

### Product specification

- connecting cable I-V(ZN)H
- duplex cable for direct connector assembly for indoor use
- bend insensitive fiber
- cable sheath: LSHF-FR
- UV-resistant, metal-free, longitudinally watertight
- cable construction: Two 2 mm separately strain-relieved cables
- each cable with 900 µm tight buffer
- tension relief: aramide
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-2, IEC 60794-2-10, EN 187000
- variants fiber types: OS2, OM5, OM4, OM3
- each possible for 20 m as cable ring, 50 m on cardboard drum and 100 m on cardboard drum



## Data sheet

Page 2/4

## OpDAT patch cord 2x1 OM4 50.0 m

P/N

150S100050M

EAN 4251394654355

2025/10/15

Version: I

## Technical Data

## General Data

|                                   |                                                              |
|-----------------------------------|--------------------------------------------------------------|
| Fields of application             | fiber to the desk<br>office areas<br>interior<br>data center |
| Transmission technology           | Fiber optic                                                  |
| Mode type of the fiber            | Multimode                                                    |
| Fiber class                       | OM4                                                          |
| Cable Type                        | patch cord                                                   |
| Number of cables/ buffered fibers | 2                                                            |
| Number of fibres each cable/ wire | 1                                                            |
| Weight                            | 13 kg/km                                                     |

## Geometric characteristics

|                                    |               |
|------------------------------------|---------------|
| Cable length (m)                   | 50 m          |
| Outer diameter cable jacket (mm)   | 4 mm          |
| Outer diameter cable jacket (inch) | 0.157 in.     |
| Core-/ Fiber cladding diameter     | 2 mm / 900 µm |

## Mechanical data

|                                   |              |
|-----------------------------------|--------------|
| strain relief                     | aramide yarn |
| Tensile strength during operation | 90 N         |
| Maximum installation load (max.)  | 150 N        |
| Maximum installation load         | 40 mm        |
| Maximum operating bending radius  | 20 mm        |
| Crush (compressive strength)      | 100 N/100 mm |

## Materials and material properties

|              |     |
|--------------|-----|
| Halogen free | yes |
| Metal-free   | yes |

## Environmental conditions

|                            |                 |
|----------------------------|-----------------|
| Temperature (min. - max.)  |                 |
| Temperature - Storage °C   | -40 °C - 85 °C  |
| Temperature - Storage °F   | -40 °F - 185 °F |
| Temperature - Operating °C | -20 °C - 60 °C  |
| Temperature - Operating °F | -4 °F - 140 °F  |



## Data sheet

Page 3/4

### OpDAT patch cord 2x1 OM4 50.0 m

P/N

150S100050M

EAN 4251394654355

2025/10/15

Version: I

## Technical Data

### Environmental conditions

Temperature (min. - max.)

Temperature - Installation °C -20 °C - 60 °C

Temperature - Installation °F -4 °F - 140 °F

### Classifications

ETIM 7.0 EC001263

ETIM 8.0 EC001263

ETIM 9.0 EC001263

ETIM 10.0 EC001263

### Packing details

Type of packaging 1 pc(s) / drum

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/4

**OpDAT patch cord 2x1 OM4 50.0 m**

P/N

**150S100050M****EAN 4251394654355**

2025/10/15

Version: I

## Illustrations

Principle diagram

