Data sheet

OpDAT ADT for 4xSC-S/LC-D

P/N
1501100000HC
EAN 4251394639178
2025/09/01
Version: I

Illustrations

Dimensional drawing

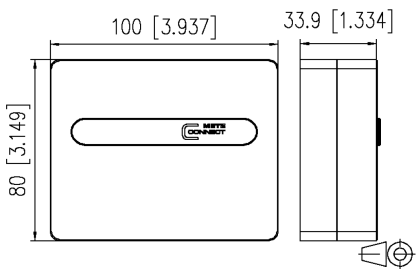

Drill pattern

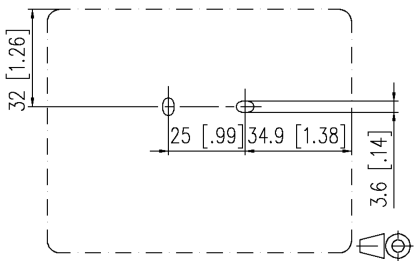

See enlarged drawings at the end of document

Product specification

- Compact, universal fiber optic termination unit for flush mounted outlets or cavity wall boxes, surface mounting or rail mounting
- To connect pre-terminated installation cables with mini breakout cables or to mount pigtails
- Equipped with 3 blind plugs
- Possible cable entries: on the back, from above, from below, from the left or the right side
- With integrated clips for rail mounting in two directions
- Pivoting, removable splice tray for up to 8 shrink splice protections
- Cover removable without tool
- Plug direction 90°
- Color of the cover parts pure white RAL 9010

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet

OpDAT ADT for 4xSC-S/LC-D

P/N
1501100000HC
EAN 4251394639178
2025/09/01
Version: I

Technical Data

General Data	
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	surface mount, standard rail TH35
Color	pure white - RAL 9010
Dimensions	
Dimension (L x W x H)	80 mm x 100 mm x 35 mm
Dimension (L x W x H)	3.15 in. x 3.937 in. x 1.378 in.

Connections/interfaces	
Number of ports interface 1	4
Number of ports interface 2	4
Number of equipped ports interface 1	0
Number of ports interface 2 equipped	0
Module plug-in direction	straight
Mechanical data	
Cut-out	SC

Materials and material properties	
Material - Housing	ABS + PC
Halogen free	yes
RoHS	compliant

Environmental conditions	
Temperature (min. - max.)	
Temperature - Storage °C	-10 °C - 60 °C
Temperature - Storage °F	14 °F - 140 °F
Temperature - Operating °C	-10 °C - 60 °C
Temperature - Operating °F	14 °F - 140 °F
Particulate ingress	IP2X
Liquid ingress/immersion	IPX0

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

P/N
1501100000HC
EAN 4251394639178
2025/09/01
Version: I

Technical Data

Classifications

ETIM 7.0	EC000058
ETIM 8.0	EC000058
ETIM 9.0	EC000058
ETIM 10.0	EC000058

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

P/N
1501100000HC
EAN 4251394639178
2025/09/01
Version: I

Accessories

P/N	Designation
1509007G-I	OpDAT adapter LC-Duplex APC OS2 with inner shutter

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet

OpDAT ADT for 4xSC-S/LC-D

P/N
1501100000HC
EAN 4251394639178
2025/09/01
Version: I

Illustrations

Dimensional drawing

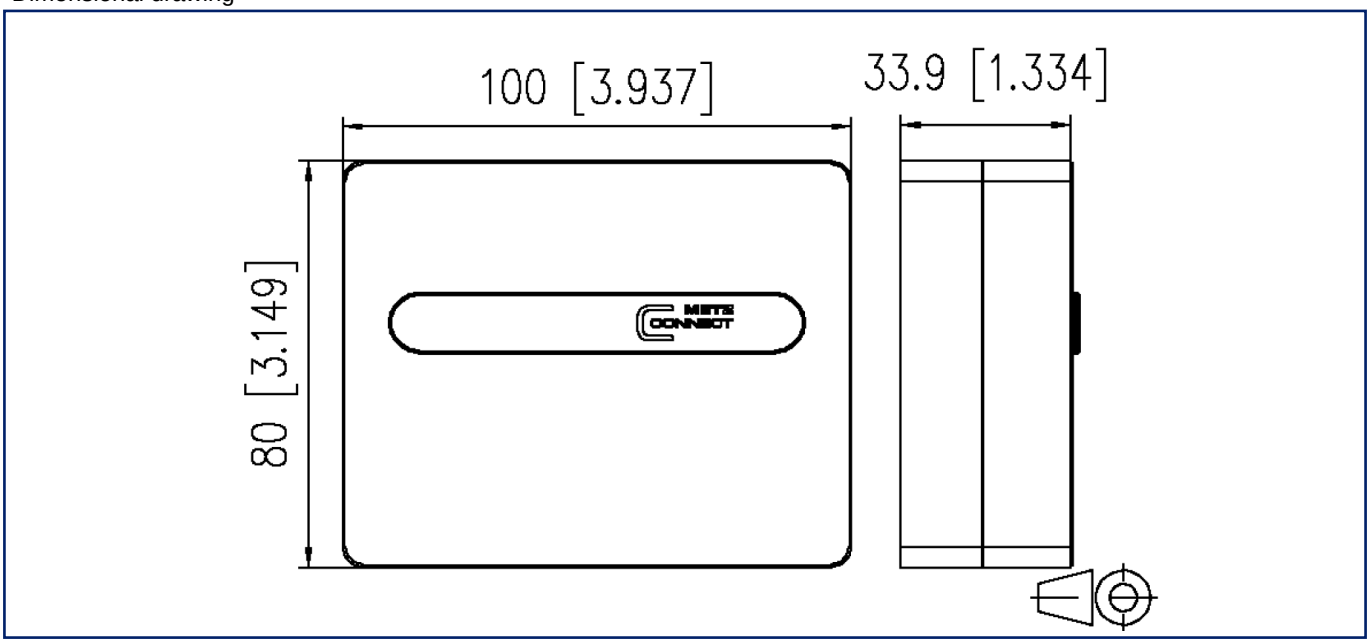

Drill pattern

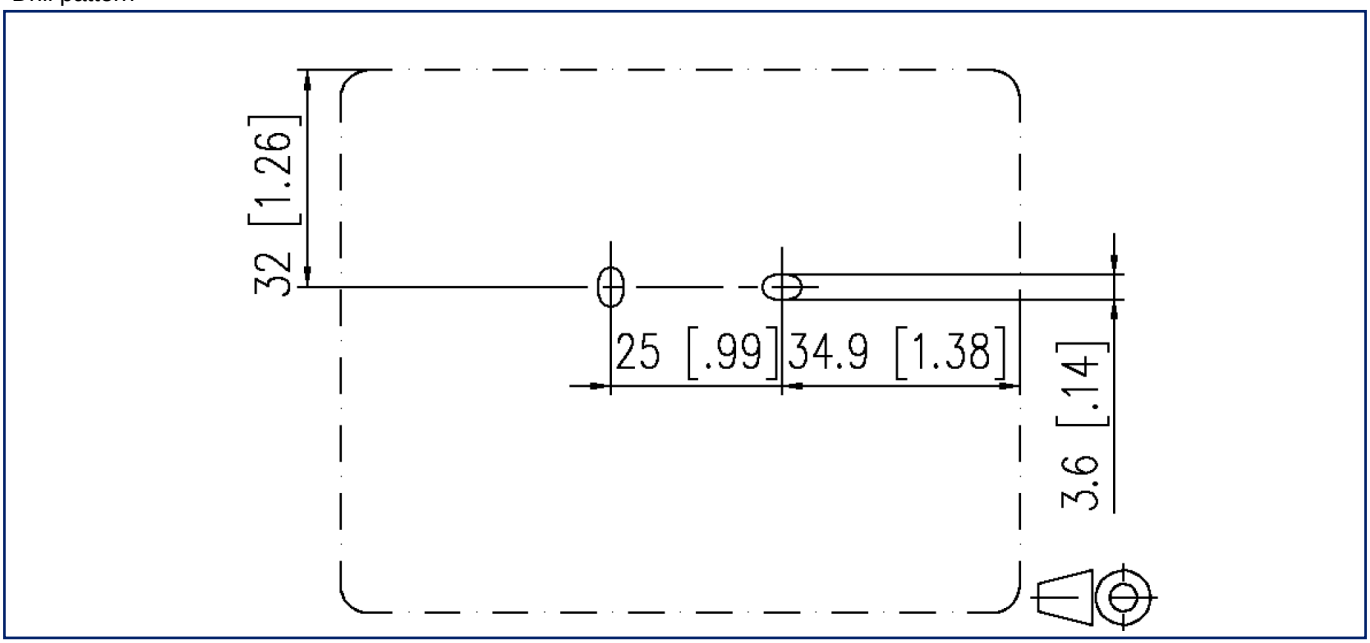

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!