

# Data sheet

## SP044xxVBNN ASP044

Page 1/5

P/N  
ASP0440522xx

xx=number of poles


2026/02/10

Version: C

### Illustrations



Dimensional drawing as an example

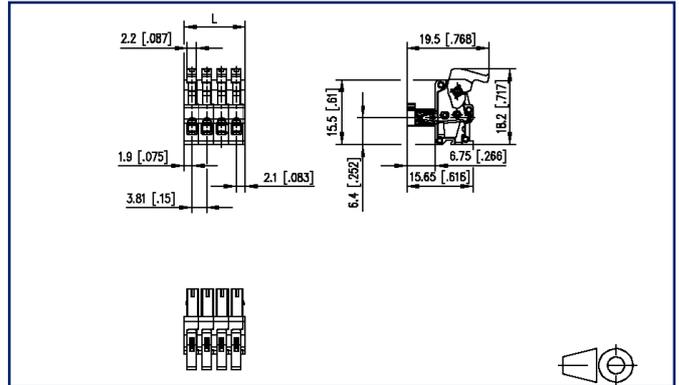

See enlarged drawings at the end of document

### Product specification

- spring clamp terminal block, pluggable
- centerline 3.81 mm, direction of connection vertical 0°
- color black
- eccentric lever, wire entry uncodeable side parallel to plug direction



**Data sheet**  
**SP044xxVBNN ASP044**

Page 2/5

**P/N**  
**ASP0440522xx**  
**xx=number of poles**  
2026/02/10  
Version: C

**Technical Data**

<b>General Data</b>			
pole size	5		
Insulating material class	CTI 400		
clearance/creepage dist.	2.6 mm		
Protection category	IP20		
Insul. strip length	6 mm		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	32 V	200 V	200 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV
<b>Terminal data</b>			
rat.wiring solid AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 28 - AWG 16		
<b>Approvals</b>			
 V / A	150 / 10		
approval UL - File No.	E121004		
	130 V / 2.5 kV / 10 A		
<b>Material</b>			
insulating material	PA46		
flammability class	V0		
spring material	Spring steel		
contact material	CuSn		
Contact surface	Sn		
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12		
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13		
<b>Climatic Data</b>			
upper limit temperature	105 °C		
lower limit temperature	-40 °C		
<b>general</b>			
Tolerance	ISO 2768 -mH		

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet

Page 3/5

**SP044xxVBNN ASP044**

P/N

**ASP0440522xx****xx=number of poles**

2026/02/10

Version: C

## Technical Data

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

**SP044xxVBNN ASP044**

P/N

**ASP0440522xx****xx=number of poles**

2026/02/10


Version: C

**Counterpart**

P/N	Designation
311901	PR044xxHBBN Type 190
311911	PR044xxVBBN Type 191
313821	PT094xxHBBN Type 382
313831	PT094xxVBBN Type 383

## Illustrations

Dimensional drawing as an example

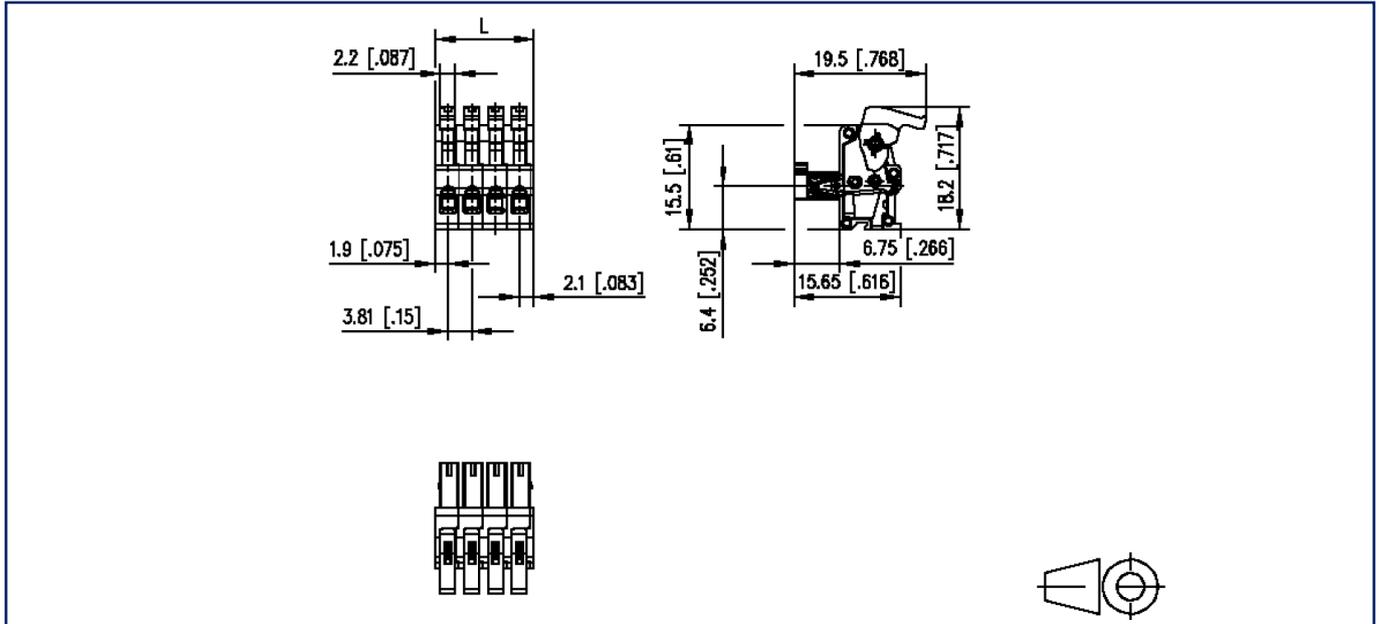

$L = (\text{pole size} - 1) \times \text{centerline} + 4 \text{ mm } [0.157]$