


Data sheet

FRAS 4/21 24 V AC/DC CAN


Illustrations



Principle diagram

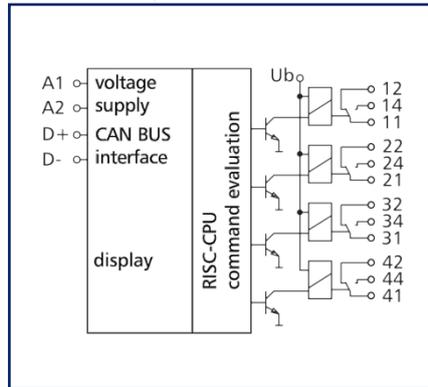

Wiring diagram

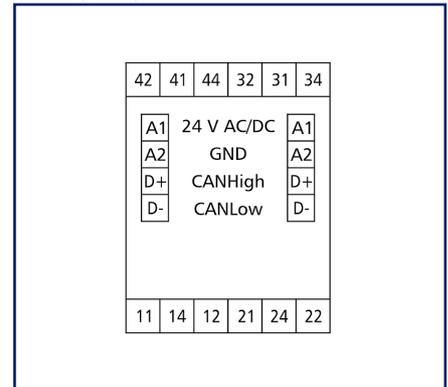

See enlarged drawings at the end of document

Product specification

CAN module with 4 digital outputs. It is suitable for switching electrical components, for example motors, contactors, lamps, louvers, etc. With strong inductive loads, we recommend protecting the relay contacts additionally with an RC element. The fieldbus module is an input module for universal use. It is controlled by means of the CAN bus. The module is addressed by means of an adjustable address. Data bytes transmit whether data are queried or commands are executed. If there is a digital input module with the same address in the system, the module can be operated by remote control.

- Connection with screw type terminal blocks

Data sheet
FRAS 4/21 24 V AC/DC CAN

Technical Data

RS485 interface

Protocol	CAN
Address range	00 - 99
Bus interface	2.0B passive (two wire bus)
Transmission parameters	
Transmission rate	min. 20 Kbit/s max. 500 Kbit/s
Transmission rate default setting	125 Kbit/s

Supply

Operating voltage	24 V AC/DC +/- 10 % (SELV)
Power consumption	
Power consumption AC (max.)	205 mA
Power consumption DC (max.)	67 mA
Duty cycle relative	100 %
Recovery time	550 ms

Outputs

Digital outputs	4 changeover contacts
Switching voltage (max.)	250 V AC
Continuous current	5 A
Total current across all outputs	12 A
Contact material	AgNi
Switching frequency	360 switching cycles/h
Mechanical life	1x10 ⁷ switching cycles
Electrical life	1x10 ⁵ switching cycles

Isolation

Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation

Data sheet
FRAS 4/21 24 V AC/DC CAN

Page 3/7

P/N
1105701321
EAN 4250184122517
2025/08/18
Version: I

Technical Data

Housing	
Dimensions	
Dimension (W x H x D)	35 mm x 69.3 mm x 60 mm
Dimension (W x H x D)	1.378 in. x 2.728 in. x 2.362 in.
Weight	104 g
Mounting style	Standard rail TH35
Mounting position	any
Connection type	Screw type terminal blocks
Indicator	green, red and yellow LED
Terminal blocks	
Supply and bus	
Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm ² / max. 16 AWG
Stranded wire (AWG)	max. 1 mm ² / max. 18 AWG
Wire diameter	min. 0.3 mm max. 1.4 mm
Module connection	
Wire cross section solid	0.34 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section multi	0.25 mm ² - 2.5 mm ² / AWG 22-12
Wire cross section with wire ferrule	0.25 mm ² - 2.5 mm ² / AWG 22-12
Screw torque (max.)	0.5 Nm
Stripping length (min.)	8 mm
Protection circuit	Polarity reversal protection for DC operating voltage
Material	
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat

FRAS 4/21 24 V AC/DC CAN

P/N

1105701321

EAN 4250184122517

2025/08/18

Version: I

Technical Data**Protection category according to IEC 60529**

Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20

Climatic Data

Operating

Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing

Storage

Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

Classifications

ETIM 7.0	EC001097
ETIM 8.0	EC001097
ETIM 9.0	EC001097
ETIM 10.0	EC001097

Software and additional documents

Software and documentation	Further documentation is available for free download at www.metz-connect.com
----------------------------	--

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet
FRAS 4/21 24 V AC/DC CAN

Page 5/7

P/N
1105701321
EAN 4250184122517
2025/08/18
Version: I

Accessories

P/N	Designation
110369	Terminal block Type 259
110486	HUB DC
110561	Power supply NG4 24 V DC
31135104	Typ 135 RIACON 135_3.5




Data sheet
FRAS 4/21 24 V AC/DC CAN

Page 6/7


P/N
1105701321
EAN 4250184122517
2025/08/18
Version: I

Illustrations

Dimensional drawing

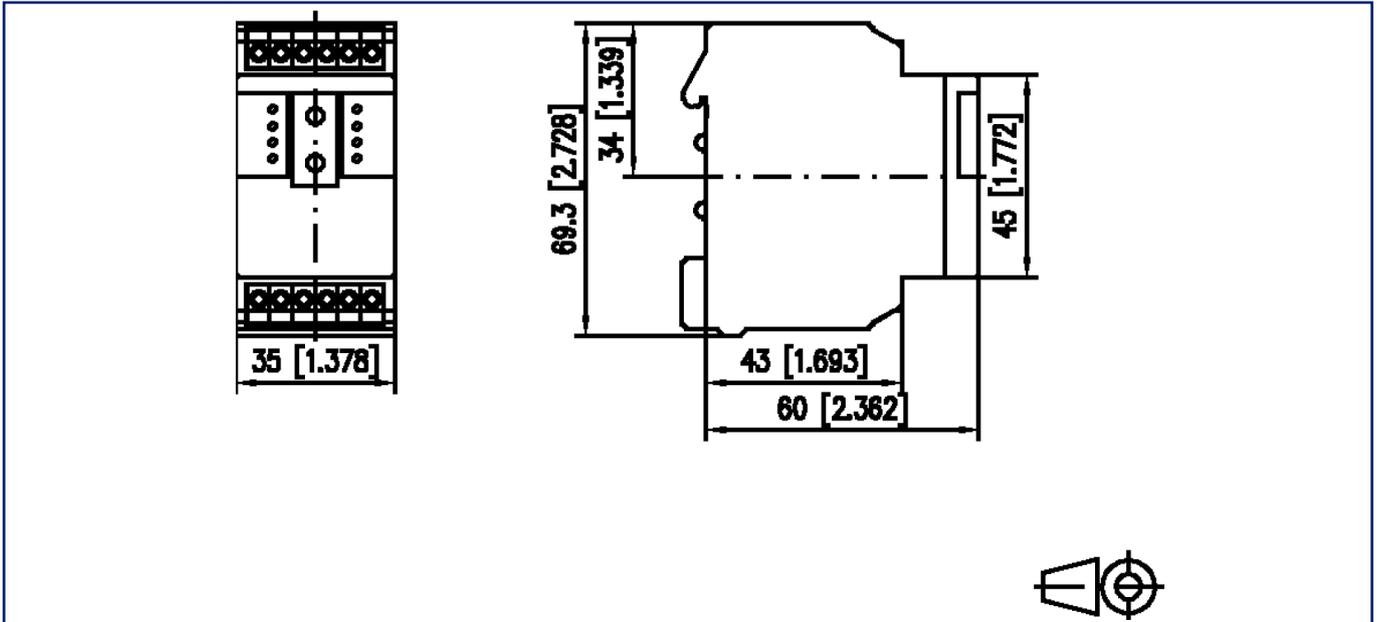

Wiring diagram

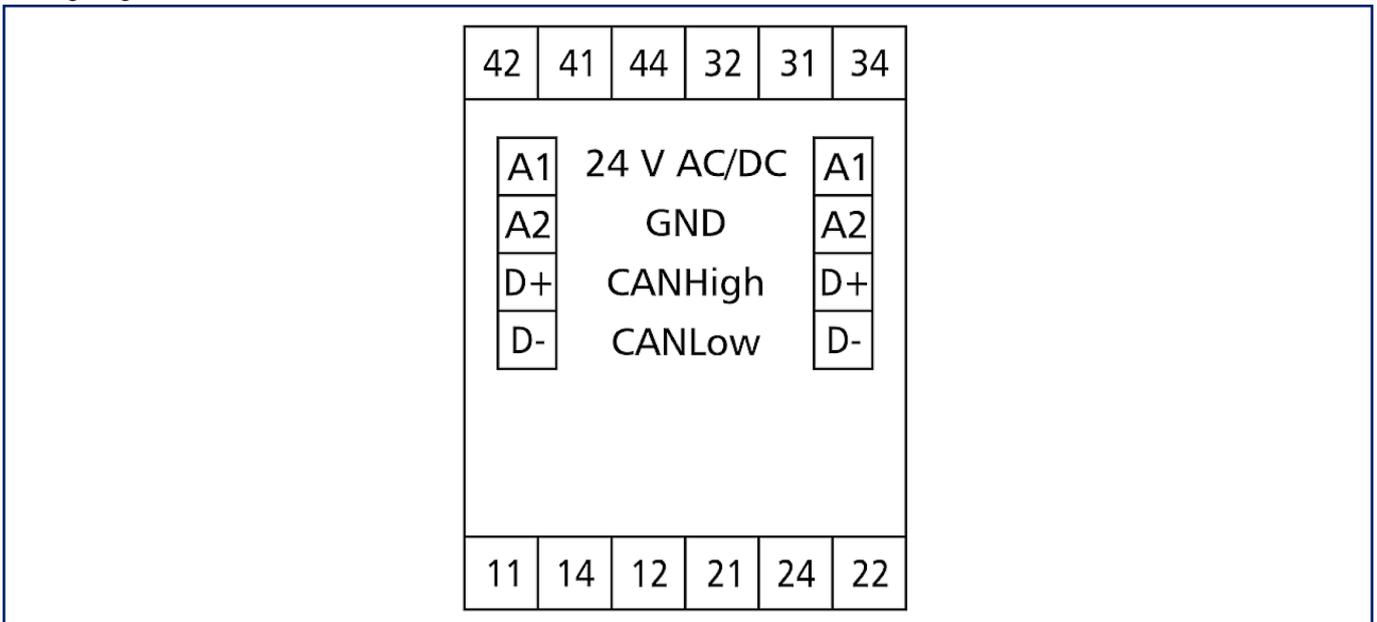

Illustrations

Principle diagram

