


Data sheet

OpDAT universal cable 1x8 OS2 class C_{ca}


Page 1/4

P/N
150U0089C120D
EAN 4251394687155
2025/06/12
Version: B

Illustrations

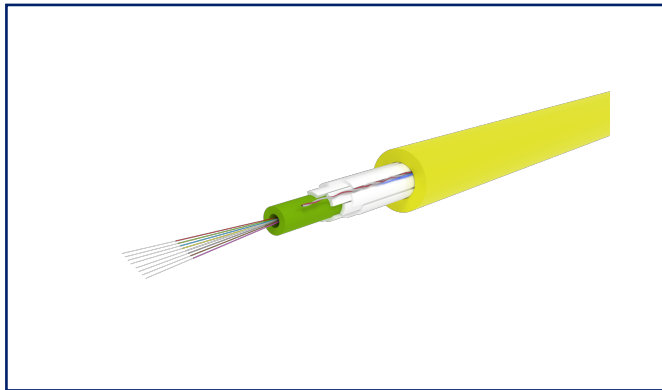

Principle diagram

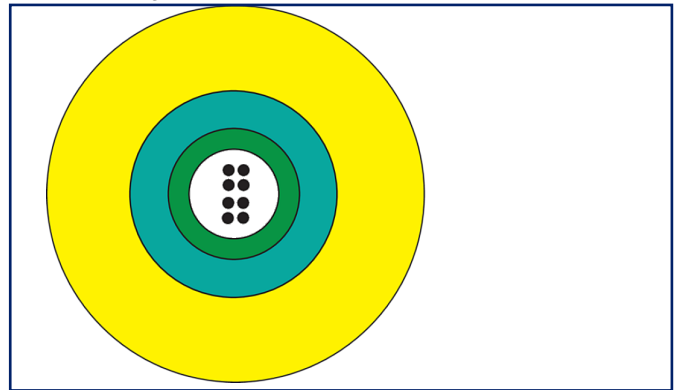

See enlarged drawings at the end of document

Product specification

- installation cable U-DQ(ZN)BH
- Universal fibre optic cable for indoors/outdoors with double tube construction and central tube (up to 24 fibres)
- bend insensitive fiber
- UV-resistant, metal-free, longitudinally waterproof, tensile strength and rodent repellent
- cable jacket: LSHF (FireRes®)
- cable structure: filled loose tubes
- cable diameter for central loose tube 7.5 mm with 24 fibers per loose tube
- strain relief: longitudinally waterproof wrapping, glasroving elements
- for laying in ducts or directly in the ground in a suitable layer of sand
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-1, EN 187000
- fire behaviour: class C_{ca}- s1a, d1,a1 (classification acc. to EN 13501-6)
- all available variants can be created with the configurator



OpDAT universal cable 1x8 OS2 class C_{ca}

P/N
150U0089C120D
EAN 4251394687155
2025/06/12
Version: B

Technical Data

General Data

Fields of application	interior structured building cabling
Transmission technology	Fiber optic
Color coding fiber/ wire(s)	IEC 60304
Mode type of the fiber	Singlemode
Fiber class	OS2
Cable Type	Universal cable
Number of cables/ buffered fibers	8
Number of fibres each cable/ wire	12
Weight	73 kg/km

Geometric characteristics

Outer diameter cable jacket (mm)	7.5 mm
Outer diameter cable jacket (inch)	0.295 in.

Mechanical data

strain relief	central tension element
Tensile strength during operation	1000 N
Maximum installation load (max.)	3000 N
Maximum installation load	75 mm
Maximum operating bending radius	150 mm
Impact resistance	20 Nm
Crush (compressive strength)	3000 N/100 mm
Torsion resistance	5 cycles ± 1 rotation
Fire load	1123 MJ/km

Materials and material properties

Rodent protection	rodent repellent
Halogen free	yes
Metal-free	yes
UV-resistance	yes

OpDAT universal cable 1x8 OS2 class C_{ca}

P/N
150U0089C120D
EAN 4251394687155
 2025/06/12
 Version: B

Technical Data

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-30 °C - 60 °C
Temperature - Storage °F	-22 °F - 140 °F
Temperature - Operating °C	-40 °C - 70 °C
Temperature - Operating °F	-40 °F - 158 °F
Temperature - Installation °C	-15 °C - 60 °C
Temperature - Installation °F	5 °F - 140 °F

Standards/Regulations

Common test methods for cables under fire conditions

Fire behaviour - class (EN 50399)		Cca
-----------------------------------	------------------------------------------------------------------------------------	-----

Classifications

ETIM 7.0	EC000034
ETIM 8.0	EC000034
ETIM 9.0	EC000034

Packing details

Type of packaging	1 pc(s) / drum
-------------------	----------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/4

OpDAT universal cable 1x8 OS2 class C_{ca}

P/N

150U0089C120D

EAN 4251394687155

2025/06/12

Version: B

Illustrations

Principle diagram

