

## Data sheet

### OpDAT slide<sup>2</sup> patch panel splice 12xLC-D APC OS2 gray

P/N


1504697612-F

EAN 4251394678450


2025/10/09

Version: E

## Illustrations

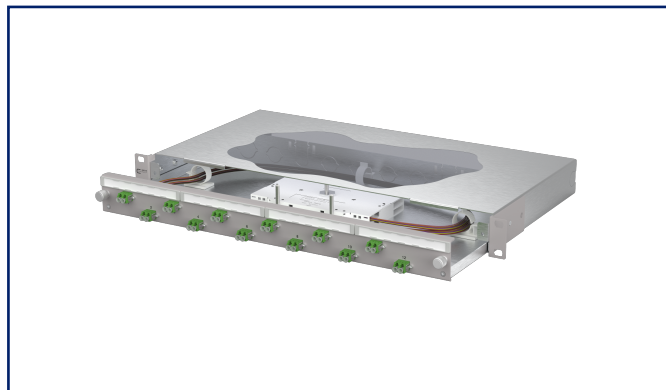

Dimensional drawing

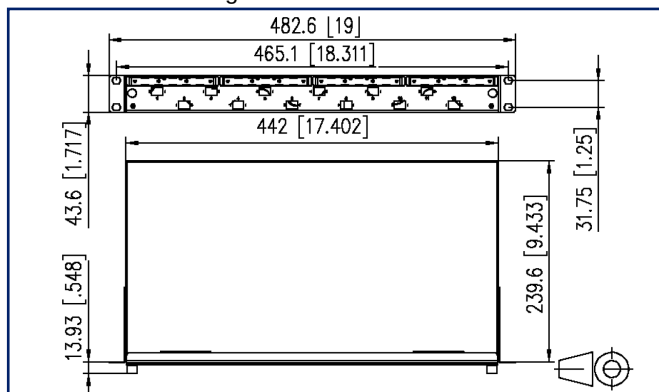

See enlarged drawings at the end of document

## Product specification

- 19-inch, 1RU patch panel with pull-out drawer
- Equipped with 12xLC-D couplers and 24xLC APC OS2 pigtails
- Offset coupler arrangement for easy handling
- Pigtails inserted and set down in standard splice cassette with crimp splice holders
- Pigtails cleaned and inserted into coupler
- color coding according to IEC 60304
- Tool-free metal bayonet catch for locking the drawer
- Drawer can be tilted and completely removed for easier installation (drawer stop)
- Depth adjustable by 30 mm
- Front panel with labelling field
- Front panel powder-coated in gray RAL 7035
- Several possibilities for cable entry on the back: 6xM20; 2xM25; 2xPrefab installation cut-outs



## Data sheet

**OpDAT slide<sup>2</sup> patch panel splice**  
**12xLC-D APC OS2 gray**

Page 2/6

P/N

1504697612-F

EAN 4251394678450

2025/10/09

Version: E

## Technical Data

### General Data

|                                   |                                                                                                         |
|-----------------------------------|---------------------------------------------------------------------------------------------------------|
| Fields of application             | data center<br>office areas<br>structured building cabling<br>interior<br>Distributed building services |
| Design                            | Eithdrawable                                                                                            |
| Mounting style                    | screwable                                                                                               |
| Transmission technology           | Fiber optic                                                                                             |
| Port numbering                    | yes                                                                                                     |
| Color housing                     | metal                                                                                                   |
| Color front plate                 | RAL 7035 - light gray                                                                                   |
| Adapter color                     | green                                                                                                   |
| Dimensions                        |                                                                                                         |
| Dimension (L x W x H)             | 244 mm x 482 mm x 47 mm                                                                                 |
| Dimension (L x W x H)             | 9.606 in. x 18.976 in. x 1.85 in.                                                                       |
| Inches                            | 19 inches                                                                                               |
| Height unit                       | 1RU                                                                                                     |
| Installation depth                | 240 mm                                                                                                  |
| Installation depth                | 9.449 in.                                                                                               |
| Number of cables/ buffered fibers | 24                                                                                                      |
| Cable Type                        | pigtail(s)                                                                                              |
| Fiber class                       | OS2                                                                                                     |
| Mode type of the fiber            | Singlemode                                                                                              |
| Shape                             | APC (Angled Physical Contact)                                                                           |
| Fiber construction                | 9/125 µm                                                                                                |
| Labeling option                   | label strip / labeling strip                                                                            |

### Connections/interfaces

|                                 |                                                   |
|---------------------------------|---------------------------------------------------|
| Adapter type                    | LC-D                                              |
| Adapter interface outside       | LC-D                                              |
| Adapter interface inside        | LC-D                                              |
| Number of adapters              | 12                                                |
| Number of breakouts front panel | 12                                                |
| Cable access/outlet             | several possibilities for cable entry on the back |



## Data sheet

Page 3/6

# OpDAT slide<sup>2</sup> patch panel splice 12xLC-D APC OS2 gray

P/N

1504697612-F

EAN 4251394678450

2025/10/09

Version: E

## Technical Data

### Optical characteristics

|                |             |
|----------------|-------------|
| Insertion loss | max. 0,3 dB |
| Return loss    | min. 65 dB  |

### Mechanical data

|                                |                   |
|--------------------------------|-------------------|
| Cut-out                        | SC-S/LC-D/E2000-S |
| Connector type                 | duplex            |
| Life - Number of mating cycles | min. 1000         |
| strain relief                  | optional          |

### Materials and material properties

|                               |                                                |
|-------------------------------|------------------------------------------------|
| Material - Housing            | sheet steel                                    |
| Material - Housing finish     | Zn (zinc)                                      |
| Material - Front cover        | sheet steel                                    |
| Material - Front cover finish | powder-coated                                  |
| Material - Sleeve             | ceramic, slotted                               |
| Material - Coupler housing    | Plastics                                       |
| RoHS                          | compliant, certificate see further information |
| REACH                         | compliant, 7439-92-1 – lead                    |

### Standards/Regulations

|                                                                                                    |                                             |
|----------------------------------------------------------------------------------------------------|---------------------------------------------|
| FO connector interfaces                                                                            | LC - IEC 61754-20                           |
| Fiber standard                                                                                     | ISO/IEC 60793-2-50 (B6_a1)   ITU-T G.657.A1 |
| Optical fibers - Interconnecting devices and passive components - basic test and measuring methods |                                             |
| Fibre optic interconnecting devices and passive components - Insertion loss                        | IEC 61300-3-4                               |
| Fibre optic interconnecting devices and passive components - Return loss                           | IEC 61300-3-6                               |
| Fibre optic interconnecting devices and passive components - Visual inspection of plug end face    | IEC 61300-3-35                              |
| Color coding fiber/ wire(s)                                                                        | IEC 60304 /VDE 0888                         |

### Classifications

|           |          |
|-----------|----------|
| ETIM 8.0  | EC001130 |
| ETIM 9.0  | EC001130 |
| ETIM 10.0 | EC001130 |



## Data sheet

Page 4/6

**OpDAT slide<sup>2</sup> patch panel splice  
12xLC-D APC OS2 gray**

P/N

1504697612-F

EAN 4251394678450

2025/10/09

Version: E

**Technical Data****Packing details**

Type of packaging 1 pc(s) / box

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 5/6

**OpDAT slide<sup>2</sup> patch panel splice  
12xLC-D APC OS2 gray**

P/N

1504697612-F

EAN 4251394678450

2025/10/09

Version: E

**Accessories**

| P/N          | Designation                                      |
|--------------|--------------------------------------------------|
| 150240M20Z-E | OpDAT strain relief M20                          |
| 150240M25Z-E | OpDAT strain relief M25                          |
| 150240Z20Z-E | OpDAT strain relief for M20                      |
| 1509010000-E | OpDAT splice tray for 12 splices, unequipped     |
| 1509010001-E | OpDAT splice tray with 1 crimp protection cover  |
| 1509010002-E | OpDAT splice tray with 2 splice protection cover |
| 15090200-E   | OpDAT cover for splice tray                      |



Data sheet

Page 6/6

# OpDAT slide<sup>2</sup> patch panel splice 12xLC-D APC OS2 gray

P/N

1504697612-F

EAN 4251394678450

2025/10/09

Version: E

## Illustrations

Dimensional drawing

