

Data sheet

OpDAT pre-assembled splice tray 12xSC PC OM3

Page 1/5

P/N


150925EO00-E

EAN 4250184174417


2026/03/06

Version: AL

Illustrations

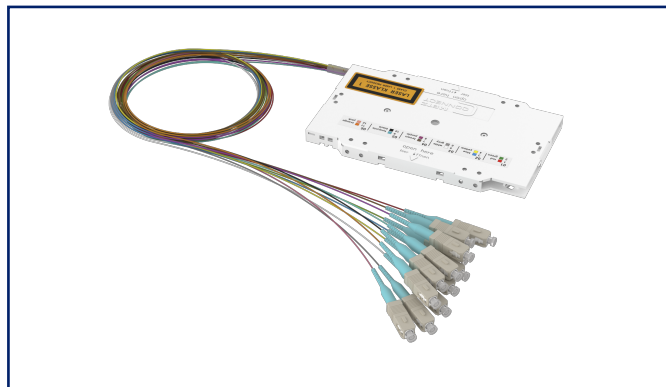

Dimensional drawing

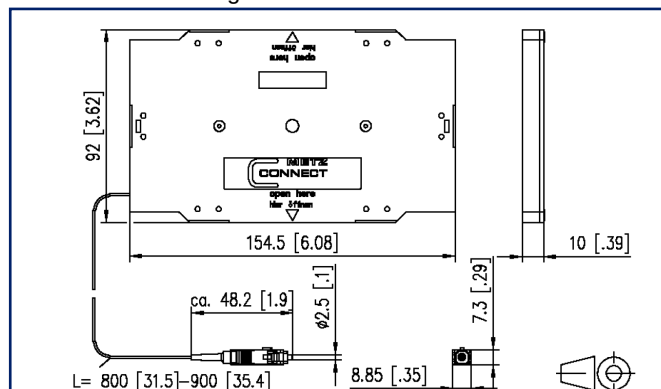

See enlarged drawings at the end of document

Product specification

- pre-assembled splice tray equipped with 12 pigtails with SC plugs
- suitable to be mounted in the following fiber optic patch panels: OpDAT fix, OpDAT slide, OpDAT PF and OpDAT PA
- standard splice tray (154.50 x 92 x 10 mm) equipped with crimp splice holder and cover
- 12 semi-tight buffer pigtails inserted and stripped
- assorted pigtail colors according to IEC 60304, primary and secondary coating in the same color
- with test report, insertion loss and return loss tested at 100 %
- lengths of the pigtails starting from tray are layered between 80 and 90 cm
- variants: available with fiber types OS2, OM5, OM4, OM3



Data sheet

Page 2/5

OpDAT pre-assembled splice tray 12xSC PC OM3

P/N

150925EO00-E

EAN 4250184174417

2026/03/06

Version: AL

Technical Data

General Data

Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	pre-assembled splice tray
Transmission technology	Fiber optic
Color	aqua
Dimensions	
Dimension (L x W x H)	92 mm x 154.5 mm x 10 mm
Dimension (L x W x H)	3.622 in. x 6.083 in. x 0.394 in.
Mode type of the fiber	Multimode
Fiber class	OM3
Cable Type	pigtail(s)
Number of cables/ buffered fibers	12
Number of fibres each cable/ wire	1
Shape	PC (Physical Contact)
Fiber construction	50/125 µm
Minimum length	0.8 m
Minimum length	2.62 ft
Maximum length	0.9 m
Maximum length	2.95 ft

Connections/interfaces

Connector technology interface 2	SC PC
----------------------------------	-------

Optical characteristics

Insertion loss	max. 0,4 dB
Return loss	min. 35 dB



Data sheet

Page 3/5

OpDAT pre-assembled splice tray 12xSC PC OM3

P/N

150925EO00-E

EAN 4250184174417

2026/03/06

Version: AL

Technical Data

Materials and material properties

Material - Coupler housing	Plastics
Material - Housing	ABS
Halogen free	yes
RoHS	compliant

Standards/Regulations

Generic cabling systems	
General requirements	ISO/IEC 11801
Fibre optic connector interfaces	IEC 61754-20
Optical fibers: Product specifications	
Sectional specification for category A1 multimode fibres	ISO/IEC 60793-2-10 (A1a.2)
Optical fibers - Interconnecting devices and passive components - basic test and measuring methods	
Fibre optic interconnecting devices and passive components - Visual inspection of plug end face	IEC 61300-3-4 IEC 61300-3-6
Standard colours for insulation for low-frequency cables & wires	IEC 60304
ITU-T standard	G.651.1

Classifications

ETIM 7.0	EC000762
ETIM 8.0	EC000762
ETIM 9.0	EC000762
ETIM 10.0	EC000762

Packing details

Type of packaging	1 pc(s) / box
-------------------	---------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

OpDAT pre-assembled splice tray 12xSC PC OM3

P/N

150925EO00-E

EAN 4250184174417

2026/03/06

Version: AL

Accessories from

P/N	Designation
1502000200-E	OpDAT PF 1HE Patchfeld festeinbau für 24xSC/LC-D, unbestückt
1502005200-E	OpDAT PF patch panel for 12xSC-D/LC-Q/ST-D
1502007300-E	OpDAT PF patch panel for 24xLC-D/SC-S/E2000-S
1502200200-E	OpDAT PA patch panel unequipped for 24xLC-D/SC-S/E2000, gray
1502205200-E	OpDAT PA patch panel for 12xSC-D/LC-Q/ST-D
1502507300-E	OpDAT fix patch panel for 24xLC-D/SC-S/E2000
150250B200-E	OpDAT fix patch panel for 24xSC-D/LC-Q/ST-D



Data sheet

Page 5/5

OpDAT pre-assembled splice tray 12xSC PC OM3

P/N

150925EO00-E

EAN 4250184174417

2026/03/06

Version: AL

Illustrations

Dimensional drawing

