

# Data sheet

## OpDAT REGpro Prefab 12xE2000-S APC OS2


Page 1/4

P/N  
15024A05912-E  
EAN 4251394637976  
2025/07/24  
Version: J

### Illustrations



Dimensional drawing

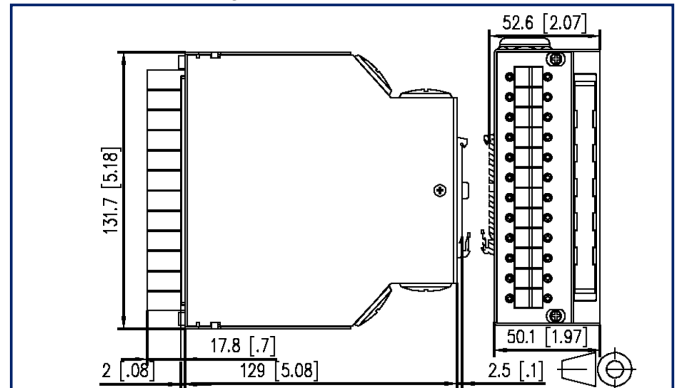

See enlarged drawings at the end of document

### Product specification

- Compact distributor housing for TH35 top hat rail systems
- Prepared for installation of pre-terminated installation cables (Prefab)
- suitable for Prefabs with universal and breakout cables with a maximum of 12 fibers
- suitable for Prefabs with mini-breakout cables with a maximum of 24 fibers
- equipped with E2000-S adapters
- Front area with identification strips
- Various mounting positions on the top hat rail system possible
- Cable insertion from above or below, straight or inclined, suitable for M20 strain relief (up to 2 possible)
- Housing made from sheet steel, powder coated (light gray, RAL 7035)
- Only available fully equipped with 12 E2000-S adapters



# OpDAT REGpro Prefab 12xE2000-S APC OS2

P/N  
15024A05912-E  
EAN 4251394637976  
2025/07/24  
Version: J

## Technical Data

### General Data

Fields of application	structured building cabling office areas harsh environment
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	Splice distributor - Prefab
Mounting style	Standard rail TH35
Transmission technology	Fiber optic
Color	gray
Dimensions	
Dimension (L x W x H)	134 mm x 50 mm x 132 mm
Dimension (L x W x H)	5.276 in. x 1.969 in. x 5.197 in.
Height unit	3RU
Horizontal pitch	7HP
Weight	800 g
Weight	1.7637 lb
Fiber class	OS2
Mode type of the fiber	Singlemode
Shape	APC (Angled Physical Contact)
Labeling option	label strip / labeling strip

### Connections/interfaces

Connector technology interface 1	E2000-S Couplers
Connector technology interface 2	E2000-S Couplers
Number of ports interface 1	12
Number of ports interface 2	12
Number of equipped ports interface 1	12
Number of ports interface 2 equipped	12
Number of ports with dust protection interface 1	12
Number of ports with dust protection interface 2	12
Cable access/outlet	from top or bottom, straight or inclined

# OpDAT REGpro Prefab 12xE2000-S APC OS2

P/N

15024A05912-E

EAN 4251394637976

2025/07/24

Version: J

## Technical Data

### Mechanical data

Cut-out	SC, LC-D, E2000
Connector type	simplex
Life - Number of mating cycles	min. 1000
strain relief	M gland

### Materials and material properties

Material - Housing	sheet steel
Material - Housing finish	powder-coated
Material - Assembly housing	sheet steel
Material - Front cover	sheet steel
Material - Front cover finish	powder-coated
Halogen free	yes
RoHS	compliant

### Classifications

ETIM 7.0	EC001130
ETIM 8.0	EC001130
ETIM 9.0	EC001130
ETIM 10.0	EC001130

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 4/4

**OpDAT REGpro Prefab 12xE2000-S APC OS2**

P/N

15024A05912-E


EAN 4251394637976

2025/07/24

Version: J

**Illustrations**

Dimensional drawing

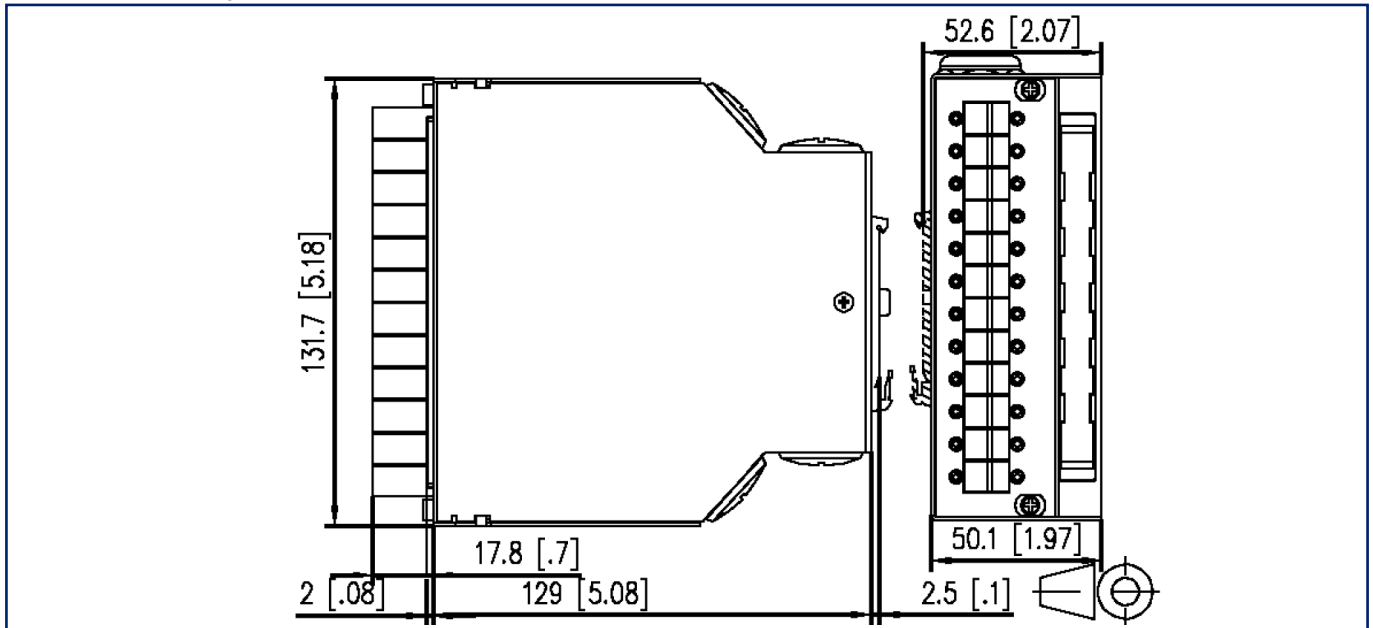

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

