

Data sheet

PC board jack M12, X-coded, 8-pole,
IP67 in unmated condition, potted

Page 1/6

P/N

MMT361A315-0009

EAN 4250184199687


2026/08/03

Version: V


Illustrations



Dimensional drawing

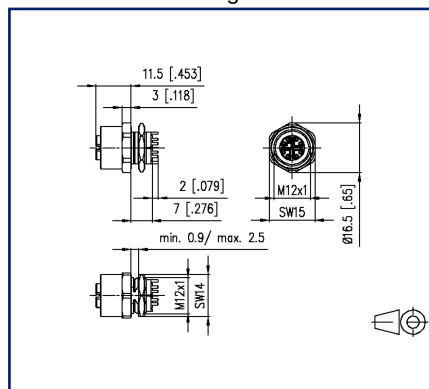

Drill pattern

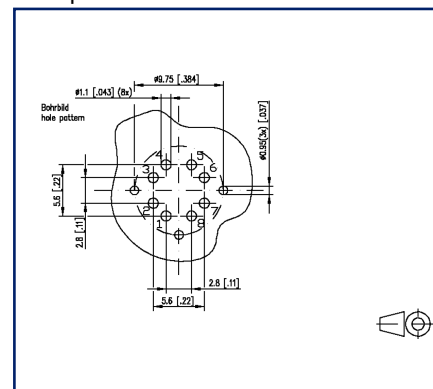

See enlarged drawings at the end of document

Product specification

- PC board jack M12
- 8-pole, X-coded according to IEC 61076-2-109
- 10 GBit suitable according to IEEE 802.3an
- wave solderable
- Top entry
- Contact carriers green
- IP67 in unmated condition
- potted
- suitable for applications in the railway industry according to data sheet



Data sheet

Page 2/6

PC board jack M12, X-coded, 8-pole, IP67 in unmated condition, potted

P/N

MMT361A315-0009

EAN 4250184199687

2026/08/03

Version: V

Technical Data

General Data

Dimensions

Dimension (D x H)	Ø 16.5 mm x 20.5 mm
Dimension (D x H)	0.65 in. x 0.807 in.
Ports	Single port
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s
Coding	X-coded

Electrical characteristics

Rated voltage	50 V AC / 60 V DC
Effective value of the withstand voltage	0.5 kV
Current carrying capacity at 40 °C	0.5 A
Insulation resistance	min. 100 MOhm
Overvoltage category	II
Degree of pollution	2

Mechanical data

Material

Material - Housing	CuZnPb
Material - Contact	CuZnPb
Contact surface	Ni + Au
Shield material	CuSn
Color	metallike
Life - Number of mating cycles	>= 100
Tightening torque - Plug	0,6 - 1 Nm
Tightening torque - Jack mounting	3 Nm +/- 0,5 Nm
Protection category	IP65, IP67 when plugged in
Particulate ingress	IP6X when plugged in
Liquid ingress/immersion	IPX5, IPX7 when plugged in

Climatic properties

Temperature - Operating °C	-25 °C - 85 °C
Temperature - Operating °F	-13 °F - 185 °F



Data sheet

Page 3/6

PC board jack M12, X-coded, 8-pole, IP67 in unmated condition, potted

P/N

MMT361A315-0009

EAN 4250184199687

2026/08/03

Version: V

Technical Data

Standards/Regulations

Railway applications

Insulating body	PA UL 94 V0 complies with HL1-HL3; R26 according to EN 45545-2:2020+A1:2023
Flammable mass (g)	0.62 g
Sealings	Elastomer
Flammable mass (g)	0.06 g
Salt spray	DIN EN 50155:2018-05, (DIN EN 60068-2-11:2000-02/ 48h test KA)
Shock and vibration	DIN EN 50155:2018-05, DIN EN 61373:2011-04 Class 1 Category B

Classifications

ETIM 7.0	EC002637
ETIM 8.0	EC002637
ETIM 9.0	EC002637
ETIM 10.0	EC002637

Packaging

Type of packaging	10 pc(s) / blister packaging
-------------------	------------------------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/6

**PC board jack M12, X-coded, 8-pole,
IP67 in unmated condition, potted**

P/N

MMT361A315-0009

EAN 4250184199687

2026/08/03

Version: V

Accessories

P/N	Designation
700701	M12 screw plug for jacks IP54



**PC board jack M12, X-coded, 8-pole,
IP67 in unmated condition, potted**

P/N

MMT361A315-0009


EAN 4250184199687

2026/08/03


Version: V

Illustrations

Dimensional drawing

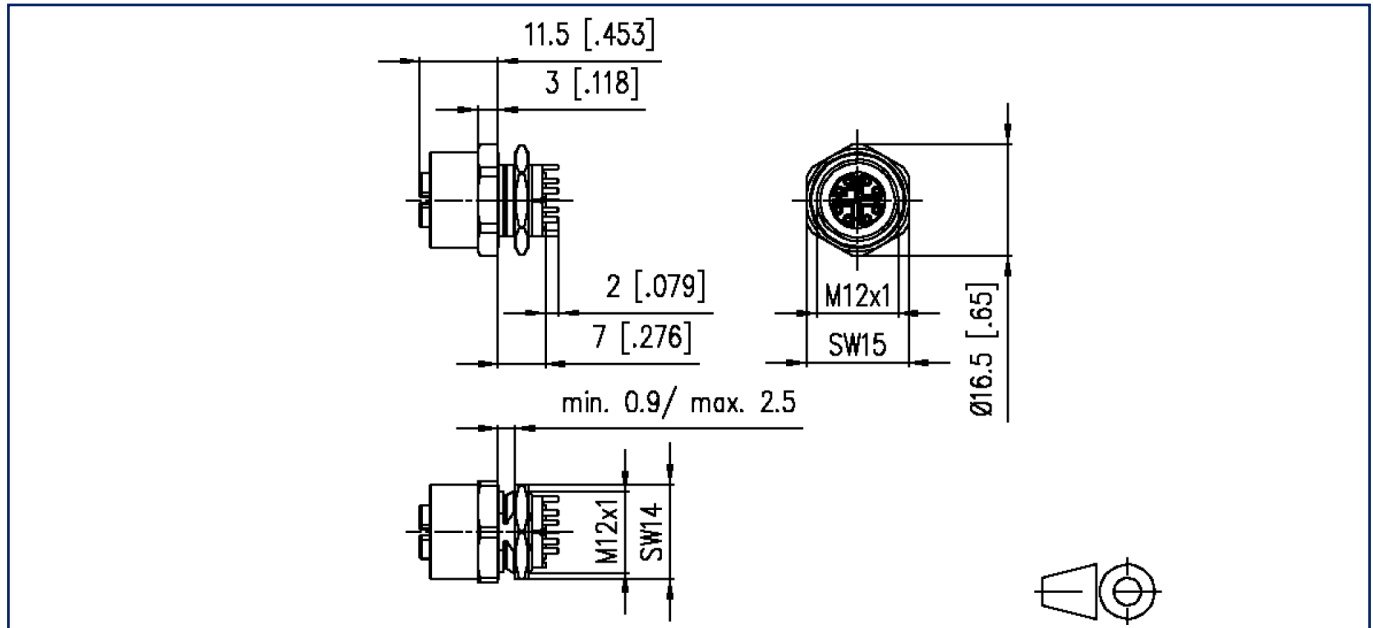

Drill pattern

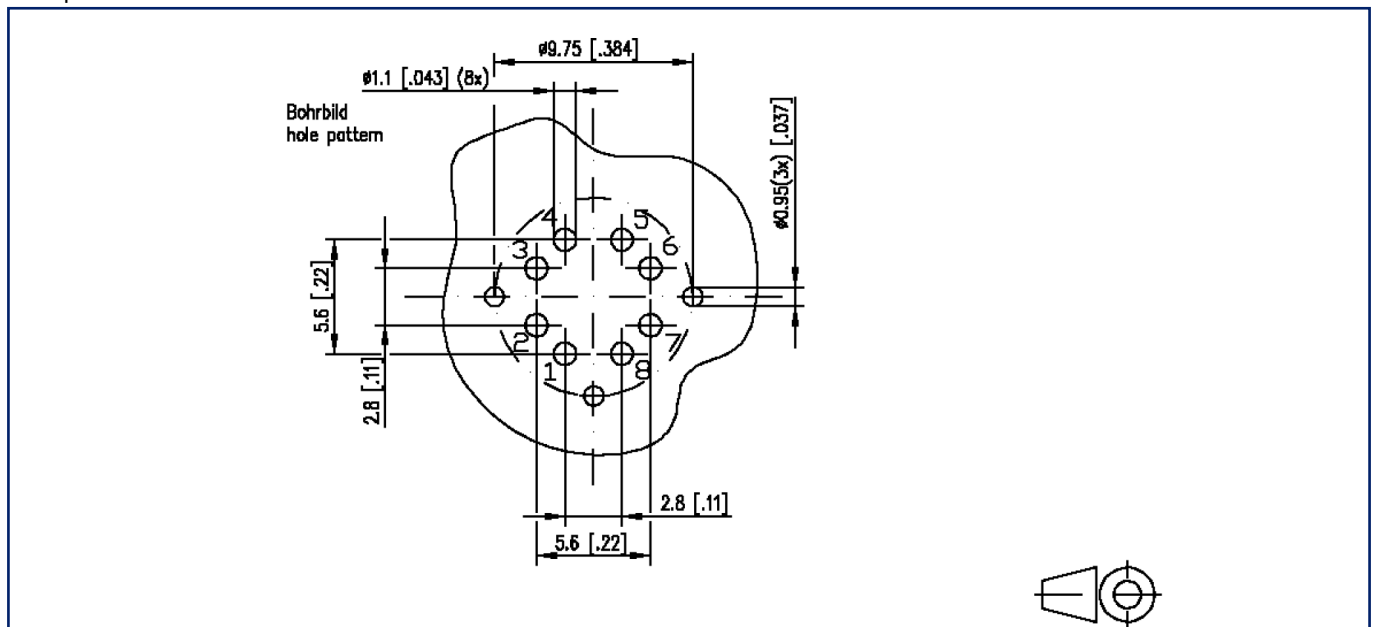

Data sheet

**PC board jack M12, X-coded, 8-pole,
IP67 in unmated condition, potted**

Page 6/6

P/N

MMT361A315-0009

EAN 4250184199687

2026/08/03

Version: V

Illustrations

Cut-out

