

Data sheet

Page 1/6


DCCS link Prefab OS2 6xLC-D APC/6xLC-D APC

P/N
130D2F9KK5XXXN


2026/09/17

Version: F

Illustrations

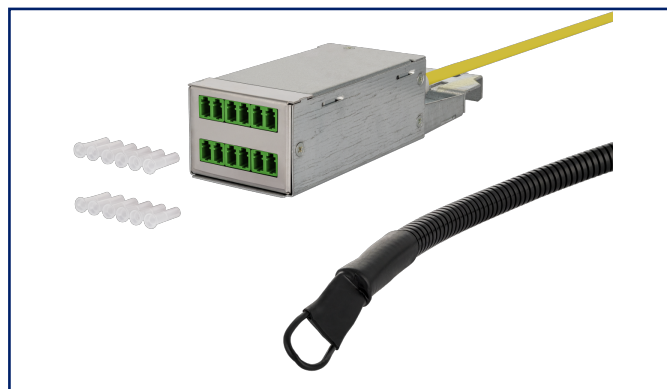

Dimensional drawing

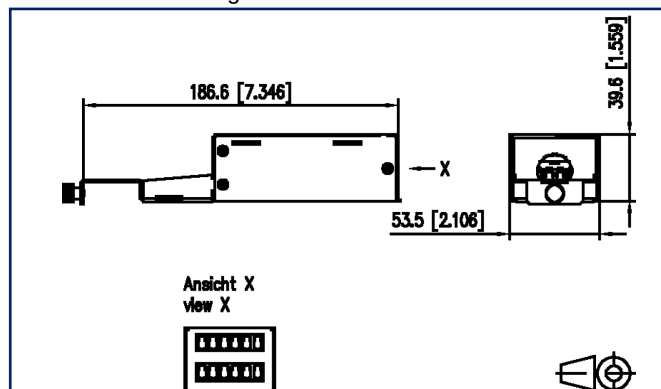

See enlarged drawings at the end of document

Product specification

- DCCS link consisting of a pre-assembled cable with DCCS housing mounted on one end. The second end is protected by a dismantle measure.
- The insertion aid allows safe installation even in narrow cable ducts. The cable end provided with connectors can then be installed in a DCCS assembly as well as in e.g. 19 inch patch panels.
- housing front side with six LC duplex couplings
- mini breakout cable with 12 fixed fibers, cable diameter 6.9 mm
- assignment/polarity: freely selectable when switching.
- easy front patching with duplex cables
- easy mounting/dismounting in DCCS subrack (19 inch, 1 U)
- delivery with serial number and measurement protocol
- housing: galvanized sheet steel, stainless steel front, strain relief via cable gland
- customer specific cable length between 2 and 999 m
- variants: blue (SM), green (SM APC), lime green (OM5), violet (OM4), aqua (OM3)
- all available variants can be created with the configurator

Data sheet

Page 2/6

DCCS link Prefab OS2 6xLC-D APC/6xLC-D APC

P/N
130D2F9KK5XXXN

2026/09/17

Version: F

Technical Data

General Data	
Fields of application	data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Shielding	shielded
Transmission technology	Fiber optic
Port numbering	yes
Color	green
Dimensions	
Dimension (L x W x H)	186.6 mm x 53.5 mm x 39.6 mm
Dimension (L x W x H)	7.346 in. x 2.106 in. x 1.559 in.
Mode type of the fiber	Singlemode
Fiber class	OS2 (ISO/IEC 11801/EN50173 & IEC 60793-2-50 B1.3, B6_a & ITU-T G.657.A1, G.652.D)
Cable Type	Mini breakout
Number of cables/ buffered fibers	1
Number of fibres each cable/ wire	12
Shape	APC (Angled Physical Contact)
Fiber construction	9/125 µm
Installation tube length	90 cm
Installation tube length	3.43 in.
Installation tube diameter	18.5 in.
Installation tube diameter	47 mm
Maximum length	500 m
Maximum length	1640.4 ft

Data sheet

Page 3/6

DCCS link Prefab OS2 6xLC-D APC/6xLC-D APC

P/N
130D2F9KK5XXXN

2026/09/17

Version: F

Technical Data

Transmission characteristics

Transmission rate up to 10 GBit IEEE 802.3an

Reach

Range 10GBASE L	25 km
Range 10GBASE LX4	10 km
Range 10GBASE EW/ER	40 km
Range 40GBASE LR4	10 km
Range 100GBASE ER4	40 km

Connections/interfaces

Connector technology interface 1 LC-D APC

Connector technology interface 2 LC-D APC

Number of ports interface 1 6

Number of ports interface 2 6

Number of equipped ports interface 1 6

Number of ports interface 2 equipped 6

Number of ports with dust protection interface 1 6

Number of ports with dust protection interface 2 6

Cable sheath diameter (min. - max.)

Cable sheath diameter 6.5

Cable sheath diameter 0.256

Mechanical data

Connector type duplex

strain relief yes

Maximum installation load 50 mm

Maximum installation load 1.969 in.

Maximum operating bending radius 100 mm

Maximum operating bending radius 3.937 in.

10 turns on a mandrel R= 15 mm, 1550 nm 0.03 dB

Data sheet

Page 4/6

DCCS link Prefab OS2 6xLC-D APC/6xLC-D APC

P/N
130D2F9KK5XXXN

2026/09/17

Version: F

Technical Data

Materials and material properties

Material - Coupler housing	Plastics
Material - Housing	sheet steel
Material - Housing finish	Zn (zinc)
Material - Sleeve	ceramic, slotted
Bend insensitivity	yes
Halogen free	yes
RoHS	compliant

Standards/Regulations

Generic cabling systems	
General requirements	ISO/IEC 11801 DIN EN 50173
Optical fibers: Indoor optical cables	
Sectional specification for class B single-mode fibres	ISO/IEC 60793-2-50 type B.1.3 & B6_b
Tests on electric and optical fibre cables under fire conditions	
Test for vertical flame propagation for a single insulated wire or cable	IEC 60332-1-2
Test for vertical flame propagation for a single insulated wire or cable	ISO/IEC 60332-1-2
Test for vertical flame spread of vertically-mounted bunched wires or cables	ISO/IEC 60332-3-24
Measurement of smoke density of cables burning	ISO/IEC 61034-2

Packing details

Type of packaging	1 pc(s) / Ring or drum
-------------------	------------------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Data sheet

Page 5/6

DCCS link Prefab OS2 6xLC-D APC/6xLC-D APC

P/N
130D2F9KK5XXXN

2026/09/17

Version: F

Accessories

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inches 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inches 1RU subrack light gray



Illustrations

Dimensional drawing

