

# Data sheet

## MB-DIO2/1-IP Modbus/BACnet 24V AC/DC

Page 1/7

P/N  
1108111326IP

EAN 4251394658346

2025/08/20

Version: H


### Illustrations



Wiring diagram



Principle diagram

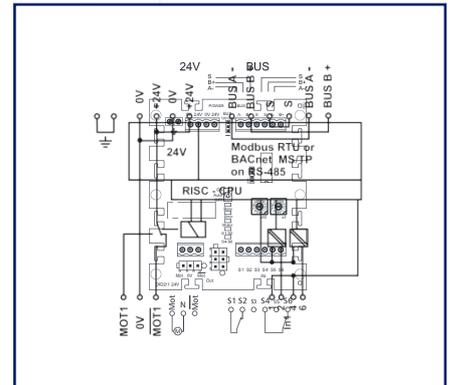

See enlarged drawings at the end of document

### Product specification

The MB-DIO2/1-IP 24 V module in IP65 housing with 2 digital inputs, as well as 1 relay output, is suitable for the inclusion of decentralized signal contacts and the control of decentralized switching tasks. As signal contacts, e.g. window contacts or the positions of ventilation flaps, etc. can be detected and controlled for switching tasks, e.g. motorized actuators or light bands, etc. Actuators with AMP connectors (AMP brand from TE Connectivity) can be connected directly to the MB-DIO2/1-IP 24 V. Depending on the operating mode, the module can be switched or requested with Modbus standard registers or with BACnet objects.

- for the control of an actuator, e.g. fire damper
- Connection options for actuators with AMP plug-in connector or open connection lines with pluggable push-in technology
- Supply voltage is also switching voltage
- Relay output suitable for inrush current 65 A < 20 ms (NO), continuous current 6A
- generous space for installation - no additional distribution box required



**Data sheet**  
**MB-DIO2/1-IP Modbus/BACnet 24V AC/DC**

P/N  
**1108111326IP**  
**EAN 4251394658346**  
 2025/08/20  
 Version: H

**Technical Data**

**Approvals**



Open Energy Management Equipment 34TZ



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BI.

**RS485 interface**

Protocol	Modbus RTU / BACnet MS/TP
Address range	00 - EF
Bus interface	RS485 two wire bus with potential equalization in bus or line topology terminate with 120 Ohm
Transmission parameters	
Transmission rate	min. 1200 Bit/s (Bd) max. 115200 Bit/s (Bd)
Transmission rate default setting	19200 Bit/s (Bd)
Parity	Odd Even (default setting) None
Stopbits	1 (default setting) 2

**Supply**

Operating voltage	24 V AC/DC +/- 10 % (SELV)
Duty cycle relative	100 %

**Inputs**

Digital inputs	2
----------------	---

**Outputs**

Digital outputs	1
Relay output	2 changeover contacts
Switching voltage relay output (max.)	24 V AC
Continuous current relay output	6 A / relay
Switch-on current relay output (max.)	65 A < 20 ms (NO)
Total current across all outputs	6 A
Mechanical life	10x10 <sup>6</sup> switching cycles

# MB-DIO2/1-IP Modbus/BACnet 24V AC/DC

P/N

1108111326IP

EAN 4251394658346

2025/08/20

Version: H

## Technical Data

### Outputs

Electrical life 10x10<sup>4</sup> switching cycles

### Insulation coil - contact set

Nominal voltage of the power supply system 24V AC/DC = Operating voltage

Overvoltage category III | II

Degree of pollution 2 | 2

Rated test voltage 4 kV | 2.5 kV

Type of insulation basic insulation | reinforced insulation

### Housing

#### Dimensions

Dimension (W x H x D) 125 mm x 175 mm x 75 mm

Dimension (W x H x D) 4.921 in. x 6.89 in. x 2.953 in.

Weight 460.9 g

Mounting style directly on a flat base, knock-out openings for screw connections  
4 x M16/25 + 8 x M12/20

Mounting position any

Indicator green, red and yellow LED

### Terminal blocks

Connection type 1 Pluggable spring clamp terminal block

Terminal block (bus) 6-pole

Terminal block (motor) 3-pole

Connection terminal (digital inputs, potential-free limit switches) 6-pole

Solid wire (AWG) max. 12 AWG

Stranded wire (mm<sup>2</sup>) max. 2.5 mm<sup>2</sup>

Stranded wire (AWG) max. 12 AWG

Wire diameter min. 0.25 mm  
max. 2.5 mm

Wire cross section solid 0.2 mm<sup>2</sup> - 2.5 mm<sup>2</sup> / AWG 22-12

Wire cross section multi 0.2 mm<sup>2</sup> - 2.5 mm<sup>2</sup> / AWG 22-12

Wire cross section with wire ferrule 0.2 mm<sup>2</sup> - 2.5 mm<sup>2</sup> / AWG 22-12

Stripping length (min.) 10 mm

Connection type 2 AMP pin header (Mate-N-Lok)

Pin header connection (motor) 3-pole (TE Connectivity 1-770170-1)

Pin header connection (digital inputs, potential-free limit switches) 6-pole (TE Connectivity 1-770178-1)

## Technical Data

### Terminal blocks

Hinged cable glands	e.g. KVT 20 with cable grommets KT 6 (6 mm) and KT 8 (8mm) from icotek (R)
Connection type 3	screw type terminal block
Terminal block (protective conductor)	2x 1-pole
Wire cross section solid	0.2 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 22-16
Wire cross section multi	0.2 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 22-18
Wire cross section with wire ferrule	0.2 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 22-18
Screw torque (max.)	0.5 Nm
Stripping length (min.)	6 mm
Protection circuit	Polarity reversal protection for DC operating voltage

### Material

Material - Housing	Polycarbonat
Color	gray
Material - Terminal block	Polyamid 6.6 V0

### Protection category according to IEC 60529

Protection category - housing (acc. to IEC 60529)	IP65 (without screw fittings)
Protection category - terminal blocks (acc. to IEC 60529)	IP20

### Climatic Data

Operating	
Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing
Storage	
Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F

Data sheet

Page 5/7

**MB-DIO2/1-IP Modbus/BACnet 24V AC/DC**

P/N

1108111326IP

EAN 4251394658346

2025/08/20

Version: H

**Technical Data****Classifications**

ETIM 7.0	EC001584
ETIM 8.0	EC001584
ETIM 9.0	EC001584
ETIM 10.0	EC001584

**Software and additional documents**

Software and documentation

Further documentation is available for free download at [www.metz-connect.com](http://www.metz-connect.com)**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 6/7

**MB-DIO2/1-IP Modbus/BACnet 24V AC/DC**

P/N

1108111326IP

EAN 4251394658346

2025/08/20

Version: H

**Accessories**

P/N	Designation
110561	Power supply NG4 24 V DC
11056170	Power supply NG4-F 24 V DC
11083001	MR-GW Modbus RTU / Modbus TCP Gateway
1108300170	MR-F-GW Modbus RTU / Modbus TCP Gateway
11088001	BMT-RTR BACnet-Router
1108800170	BMT-F-RTR BACnet-Router
11088101	BMT-RTR/SC BACnet/SC Router
1108810170	BMT-F-RTR/SC BACnet/SC Router




**Data sheet**  
**MB-DIO2/1-IP Modbus/BACnet 24V AC/DC**

Page 7/7

P/N  
1108111326IP  
EAN 4251394658346  
2025/08/20  
Version: H

**Illustrations**

Wiring diagram

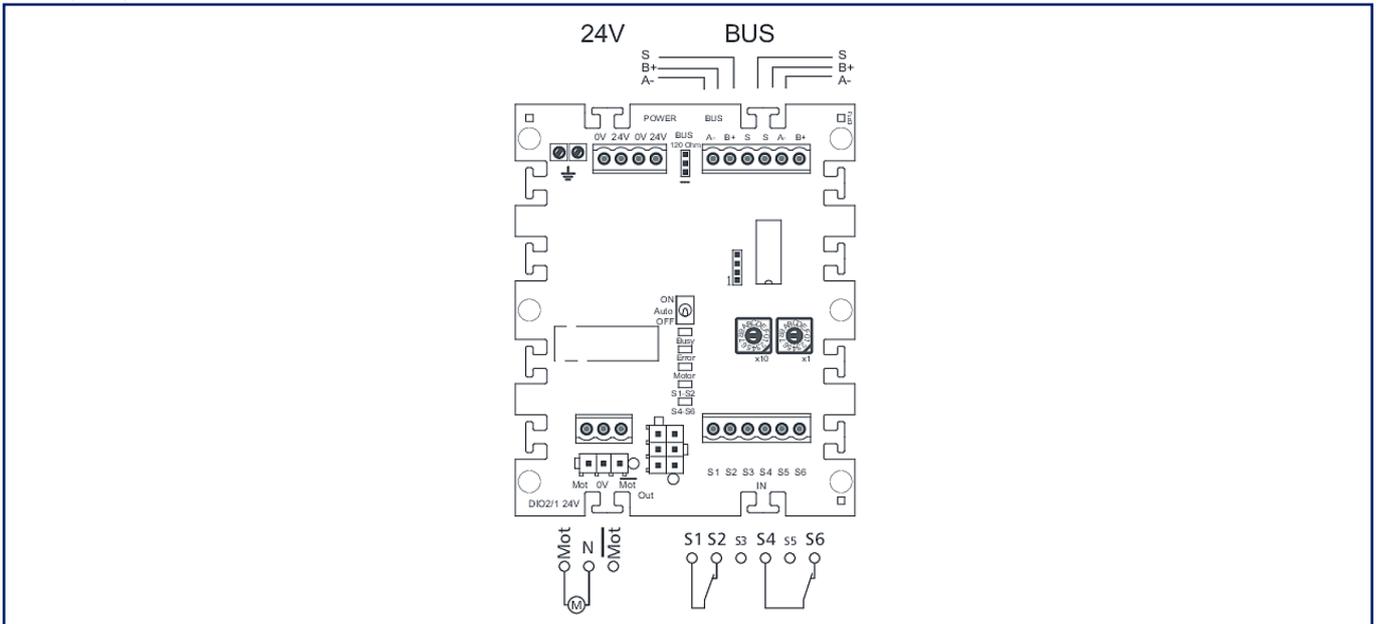

Principle diagram

