

# Data sheet

## LF-F-AM2/4 LON

Page 1/7

P/N

1108571370

EAN 4251394610009


2026/02/02

Version: G


### Illustrations



Principle diagram

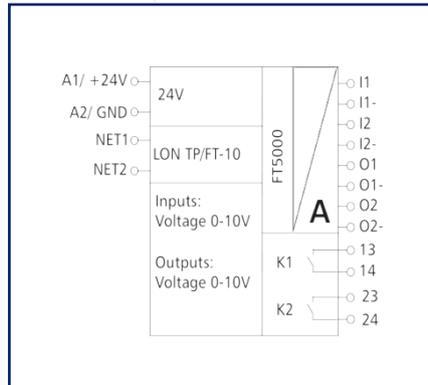

Wiring diagram

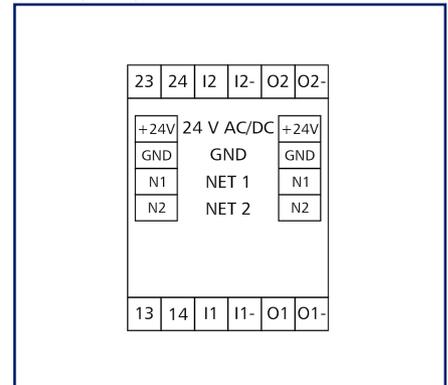

See enlarged drawings at the end of document

### Product specification

The LON I/O module with 2 analog inputs, 2 analog outputs and 2 digital outputs. It is suitable for controlling, for example, motorized vent valves and switching on alarm at the set threshold value. The inputs and outputs are scanned and activated by SNVT network variables. The analog inputs can be scanned simultaneously. The analog outputs can be activated proportionally, or previously defined voltage values can be adjusted. Both digital outputs can be activated individually or as a function of an adjustable threshold value. Suitable for decentralized mounting on DIN TH35 rail according to IEC 60715 in electrical distribution cabinets.

- Connection with spring clamp terminal blocks (push-in)

**Data sheet**  
**LF-F-AM2/4 LON**

**P/N**  
**1108571370**  
**EAN 4251394610009**  
2026/02/02  
Version: G

**Technical Data**

**Approvals**



Open Energy Management Equipment 34TZ

**RS485 interface**

Protocol	TP/FT-10, free topology
Neuron	FT5000
Data format	Standard network variables (SNVT)
Transmission parameters	
Transmission rate	78 Kbit/s
Line topology	2700 m / 64 nodes
Free topology	500 m / 64 nodes
Cabling	Twisted Pair

**Supply**

Operating voltage	24 V AC/DC +/- 10 % (SELV)
Power consumption	
Power consumption AC (max.)	95 mA
Power consumption DC (max.)	35 mA
Duty cycle relative	100 %
Recovery time	550 ms

**Inputs**

Analog inputs	2
Voltage range	0 V - 10 V DC
Resolution voltage input	10 mV / digit
Error voltage input	100 mV

**Outputs**

Analog outputs	2
Voltage range	0 V - 10 V DC
Resolution voltage output	10 mV / digit
Error voltage output	100 mV
Continuous current voltage output	5 mA at 10 V DC
Digital outputs	2
Semiconductor output	2 normally open contacts
Switching voltage semiconductor output (max.)	40 V AC/DC

**Data sheet**  
**LF-F-AM2/4 LON**

Page 3/7

**P/N**  
**1108571370**  
**EAN 4251394610009**  
2026/02/02  
Version: G

**Technical Data**

<b>Outputs</b>	
Continuous current semiconductor output	100 mA
Switch-on current semiconductor output (max.)	500 mA
<b>Housing</b>	
Dimensions	
Dimension (W x H x D)	35 mm x 69.3 mm x 60 mm
Dimension (W x H x D)	1.378 in. x 2.728 in. x 2.362 in.
Weight	82 g
Mounting style	Standard rail TH35
Mounting position	any
Apposition	without distance The maximum quantity of LON modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary.
Connection type	Spring clamp terminal blocks
Indicator	green and yellow LED
<b>Terminal blocks</b>	
Supply and bus	
Terminal block	4-pole
Solid wire (AWG)	max. 1.5 mm <sup>2</sup> / max. 16 AWG
Stranded wire (AWG)	max. 1 mm <sup>2</sup> / max. 18 AWG
Wire diameter	min. 0.3 mm max. 1.4 mm
Module connection	
Wire cross section solid	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 24-14
Wire cross section multi	0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 24-12
Wire cross section with wire ferrule	0.25 mm <sup>2</sup> - 1.5 mm <sup>2</sup> / AWG 24-16
Stripping length (min.)	8 mm
Protection circuit	Polarity reversal protection for DC operating voltage

**Data sheet**  
**LF-F-AM2/4 LON**

Page 4/7

**P/N**  
**1108571370**  
**EAN 4251394610009**  
2026/02/02  
Version: G

**Technical Data**

<b>Material</b>	
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Material - Covers	Polycarbonat
<b>Protection category according to IEC 60529</b>	
Protection category - housing (acc. to IEC 60529)	IP40
Protection category - terminal blocks (acc. to IEC 60529)	IP20
<b>Climatic Data</b>	
Operating	
Temperature - Operating °C	-5 °C - 55 °C
Temperature - Operating °F	23 °F - 131 °F
Relative humidity	max. 85 % non-condensing
Storage	
Temperature - Storage °C	-20 °C - 70 °C
Temperature - Storage °F	-4 °F - 158 °F
<b>Classifications</b>	
ETIM 7.0	EC001584
ETIM 8.0	EC001584
ETIM 9.0	EC001584
ETIM 10.0	EC001584
<b>Software and additional documents</b>	
Software and documentation	Further documentation is available for free download at <a href="http://www.metz-connect.com">www.metz-connect.com</a>

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

**Data sheet**  
**LF-F-AM2/4 LON**

Page 5/7

**P/N**  
**1108571370**  
**EAN 4251394610009**  
2026/02/02  
Version: G**Accessories**

<b>P/N</b>	<b>Designation</b>
110214	U10 USB Network Interface - TP/FT-10 Channel
110369	Terminal block Type 259
11056170	Power supply NG4-F 24 V DC
11087913	LF-FAM LON
31135104	Typ 135 RIACON 135_3.5




Data sheet  
**LF-F-AM2/4 LON**

Page 6/7


P/N  
**1108571370**  
**EAN 4251394610009**  
 2026/02/02  
 Version: G

**Illustrations**

Dimensional drawing

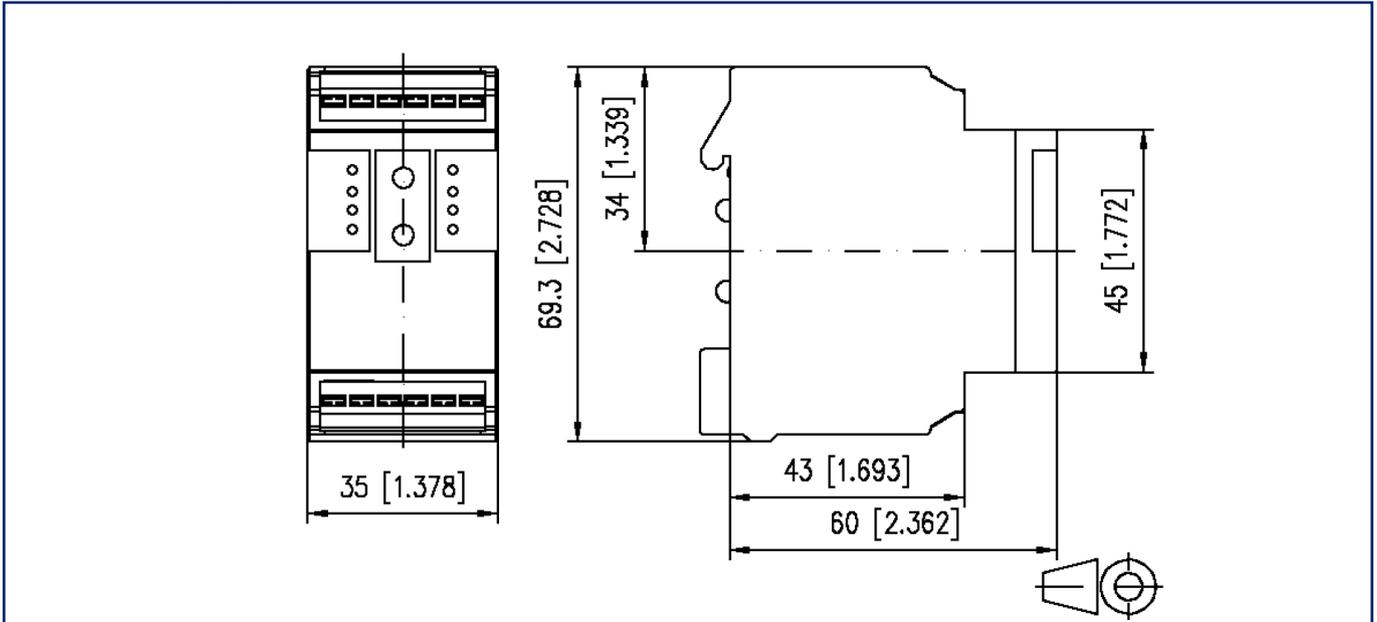

Wiring diagram

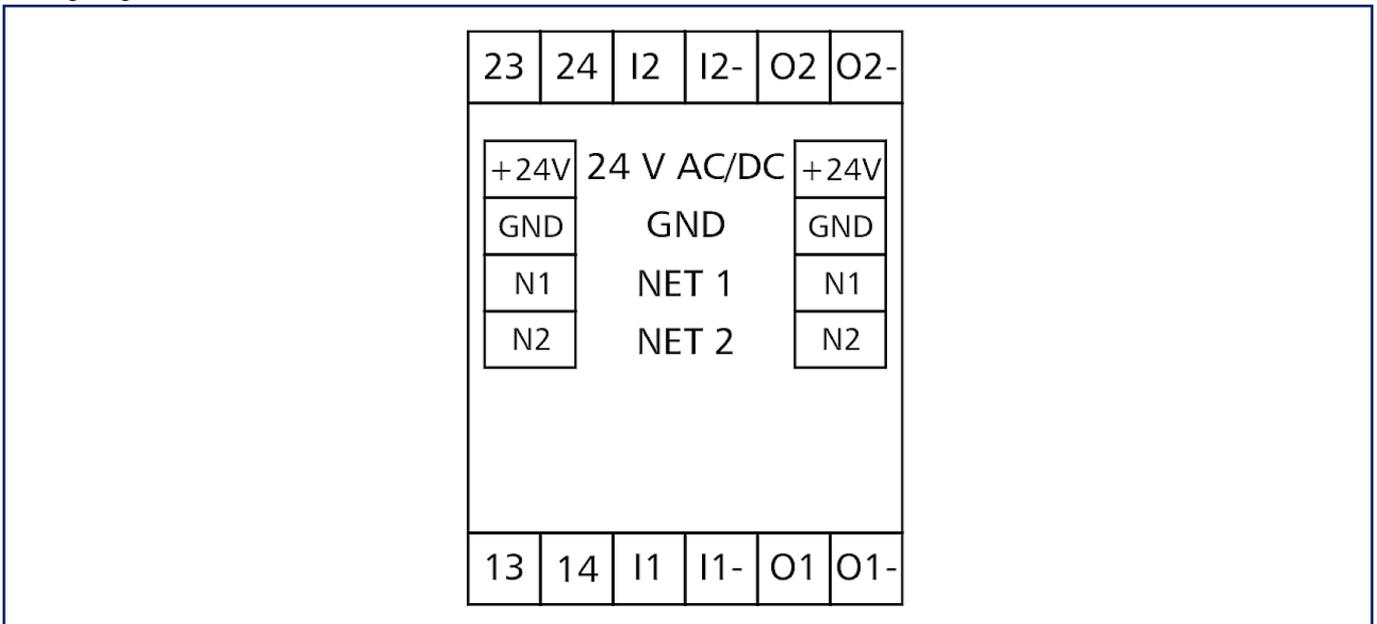


Data sheet  
**LF-F-AM2/4 LON**

Page 7/7

P/N  
**1108571370**  
EAN **4251394610009**  
2026/02/02  
Version: G

**Illustrations**

Principle diagram

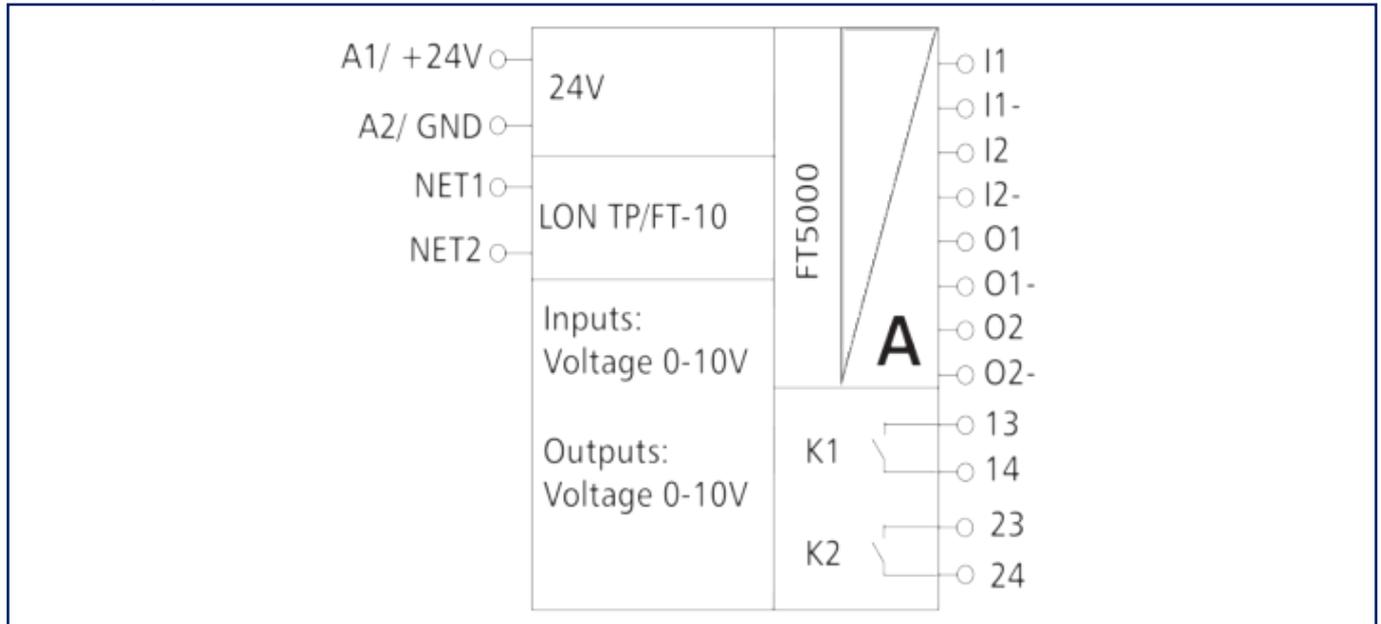

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

