

# Data sheet

## DCCS subassembly OM5 6xLC-Duplex


Page 1/5

P/N  
130D208J00000N  
EAN 4251394644912  
2025/07/23  
Version: F

### Illustrations



Dimensional drawing

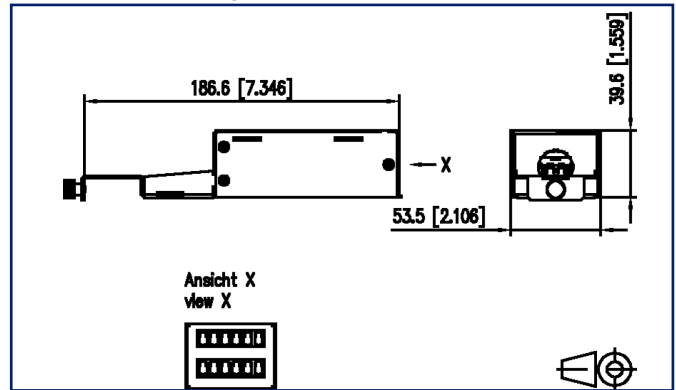

See enlarged drawings at the end of document

### Product specification

- DCCS housing with 6 LC duplex adapters front mounted
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for the installation of pre-terminated installation cables (Prefab) with mini breakout cables in customer specific lengths
- housing: galvanized sheet steel, stainless steel front, strain relief via M20 cable gland
- variants: blue (SM), green (SM APC), lime green (OM5), violet (OM4), aqua (OM3)
- all available variants can be created with the configurator

# DCCS subassembly OM5 6xLC-Duplex

P/N  
**130D208J00000N**  
**EAN 4251394644912**  
 2025/07/23  
 Version: F

## Technical Data

### General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	186.6 mm x 53.5 mm x 39.6 mm
Dimension (L x W x H)	7.346 in. x 2.106 in. x 1.559 in.
Inches	19 inches
Mode type of the fiber	Multimode

### Connections/interfaces

Connector technology interface 1	LC-D Couplers
Number of ports interface 1	6
Number of equipped ports interface 1	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

### Mechanical data

Cut-out	DCCS
Connector type	duplex
Life - Number of mating cycles	min. 1000
strain relief	yes

**DCCS subassembly OM5 6xLC-Duplex**

P/N

130D208J00000N

EAN 4251394644912

2025/07/23

Version: F

**Technical Data****Materials and material properties**

Material - Assembly housing	sheet steel
Material - Assembly housing finish	Zn (zinc)
Material - Sleeve	ceramic, slotted
Material - Coupler housing	Plastics
Halogen free	yes
RoHS	compliant

**Classifications**

ETIM 7.0	EC001129
ETIM 8.0	EC001129
ETIM 9.0	EC001129
ETIM 10.0	EC001129

**Packing details**

Type of packaging	1 pc(s) / box
-------------------	---------------

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

## DCCS subassembly OM5 6xLC-Duplex

P/N

130D208J00000N

EAN 4251394644912

2025/07/23

Version: F

### Accessories

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inch 1RU subrack light gray



**DCCS subassembly OM5 6xLC-Duplex**

P/N

130D208J00000N

EAN 4251394644912

2025/07/23

Version: F

**Illustrations**

Dimensional drawing

