

# Data sheet

## DCCS subassembly OM5 6xMTP type B

Page 1/5

P/N


130D208M00000B

EAN 4251394644936


2025/06/11

Version: F

### Illustrations

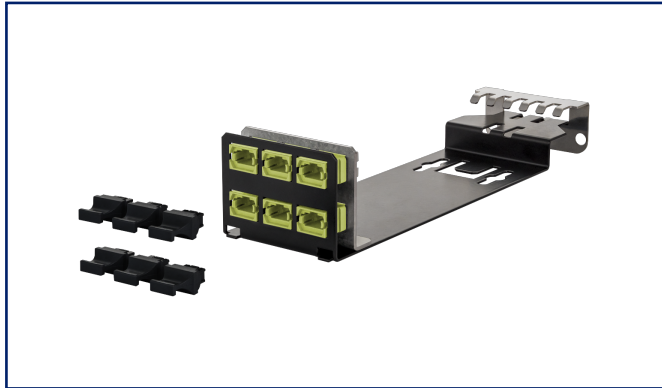

Dimensional drawing

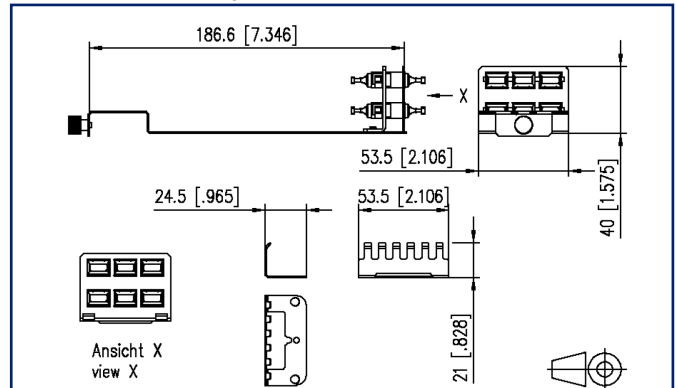

See enlarged drawings at the end of document

### Product specification

- DCCS holder with 6 MPO/MTP adapters front mounted
- MM adapters available for "aligned" (key up/key up, type B) and "opposed" (key up/key down, type A) assignment
- SM adapters available for "opposed" assignment (key up/key down, type A)
- easy assembly/disassembly in DCCS subrack (19 inch, 1 RU)
- suitable for installation of MPO/MTP câbles de liaison in customer specific lengths
- housing: black powder-coated steel-sheet housing, strain relief via included holder
- variants: green (SM), lime green (OM5), violet (OM4), aqua (OM3), assignment type A, assignment type B
- all available variants can be created with the configurator



# DCCS subassembly OM5 6xMTP type B

P/N  
**130D208M00000B**  
**EAN 4251394644936**  
 2025/06/11  
 Version: F

## Technical Data

### General Data

Fields of application	structured building cabling office areas data center
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	subassembly / assembly / module / unit
Mounting style	DCCS
Transmission technology	Fiber optic
Port numbering	yes
Color	lime green
Dimensions	
Dimension (L x W x H)	211 mm x 53 mm x 40 mm
Dimension (L x W x H)	8.307 in. x 2.087 in. x 1.575 in.
Mode type of the fiber	Multimode

### Connections/interfaces

Connector technology interface 1	MPO/MTP adapters Key up / Key up
Number of ports interface 1	6
Number of equipped ports interface 1	6
Number of ports with dust protection interface 1	6
Number of ports with dust protection interface 2	6

### Mechanical data

Cut-out	DCCS
Life - Number of mating cycles	min. 500
strain relief	optional

### Materials and material properties

Material - Assembly housing	sheet steel
Material - Coupler housing	PEI (polyetherimide)
Material - Dust protection	PC (polycarbonate)
Halogen free	yes

**DCCS subassembly OM5 6xMTP type B**

P/N

130D208M00000B

EAN 4251394644936

2025/06/11

Version: F

**Technical Data****Materials and material properties**

RoHS compliant

**Classifications**

ETIM 7.0 EC001129

ETIM 8.0 EC001129

ETIM 9.0 EC001129

**Packing details**

Type of packaging 1 pc(s) / box

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

## DCCS subassembly OM5 6xMTP type B

P/N

130D208M00000B

EAN 4251394644936

2025/06/11

Version: F

### Accessories from

P/N	Designation
130D2B1B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B1G-E	DCCS2 BGT 19 inch 1RU subrack light gray
130D2B2B-E	DCCS2 BGT 19 inch 1RU subrack black
130D2B2G-E	DCCS2 BGT 19 inch 1RU subrack light gray



**DCCS subassembly OM5 6xMTP type B**

P/N  
130D208M0000B  
EAN 4251394644936  
2025/06/11  
Version: F

**Illustrations**

Dimensional drawing

