

# Data sheet

## OpDAT patch cord 1x1 OS2 20.0 m

Page 1/4

P/N


150P300020M

EAN 4251394654225


2025/10/15

Version: J

### Illustrations

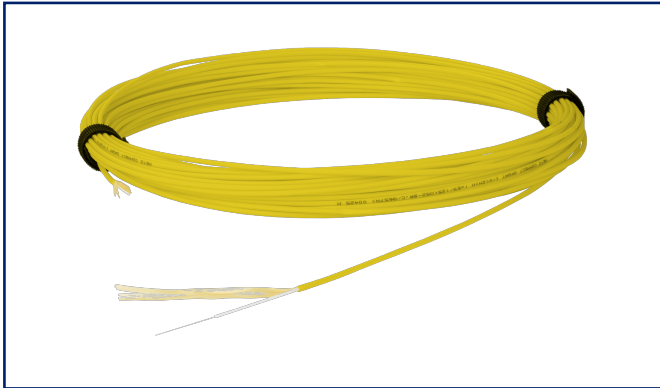

Principle diagram

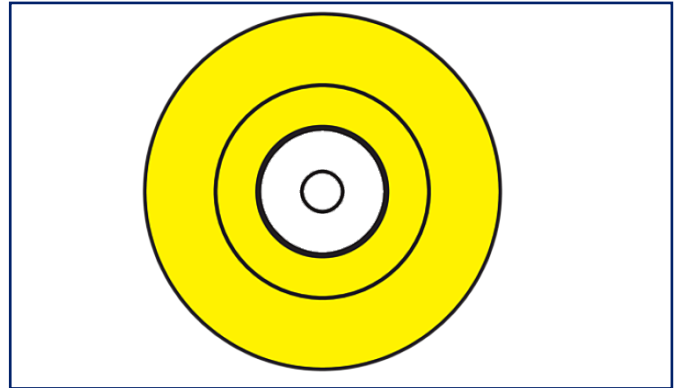

See enlarged drawings at the end of document

### Product specification

- connecting cable I-V(ZN)H
- simplex cable for direct connector assembly for indoor use
- bend insensitive fiber
- cable sheath: LSHF
- UV-resistant, metal-free, longitudinally watertight
- cable construction: Ø2 mm with 900 µm tight buffer
- tension relief: aramide
- applicable standards: EN 50173-1, ISO 11801 2nd edition, IEC 60794-2, IEC 60794-2-10, EN 187000
- variants fiber type OS2: 20 m as cable ring, 50 m on cardboard drum, 100 m on cardboard drum



# OpDAT patch cord 1x1 OS2 20.0 m

P/N

150P300020M

EAN 4251394654225

2025/10/15

Version: J

## Technical Data

### General Data

Fields of application	office areas fiber to the desk interior data center
Transmission technology	Fiber optic
Mode type of the fiber	Singlemode
Fiber class	OS2
Cable Type	patch cord
Number of fibres each cable/ wire	1

### Geometric characteristics

Cable length (m)	20 m
Outer diameter cable jacket (mm)	2 mm
Outer diameter cable jacket (inch)	0.079 in.
Core-/ Fiber cladding diameter	900 µm

### Mechanical data

strain relief	aramide yarn
Tensile strength during operation	60 N
Maximum installation load (max.)	100 N
Maximum installation load	40 mm
Maximum operating bending radius	20 mm
Crush (compressive strength)	100 N/100 mm

### Materials and material properties

Halogen free	yes
Metal-free	yes

### Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 85 °C
Temperature - Storage °F	-40 °F - 185 °F
Temperature - Operating °C	-20 °C - 60 °C
Temperature - Operating °F	-4 °F - 140 °F
Temperature - Installation °C	-20 °C - 60 °C
Temperature - Installation °F	-4 °F - 140 °F

Data sheet

Page 3/4

**OpDAT patch cord 1x1 OS2 20.0 m**

P/N

150P300020M

EAN 4251394654225

2025/10/15

Version: J

**Technical Data****Classifications**

ETIM 7.0	EC001263
ETIM 8.0	EC001263
ETIM 9.0	EC001263
ETIM 10.0	EC001263

**Packing details**

Type of packaging 1 pc(s) / drum

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

OpDAT patch cord 1x1 OS2 20.0 m

Page 4/4

P/N

150P300020M

EAN 4251394654225

2025/10/15

Version: J

## Illustrations

Principle diagram

